rainco

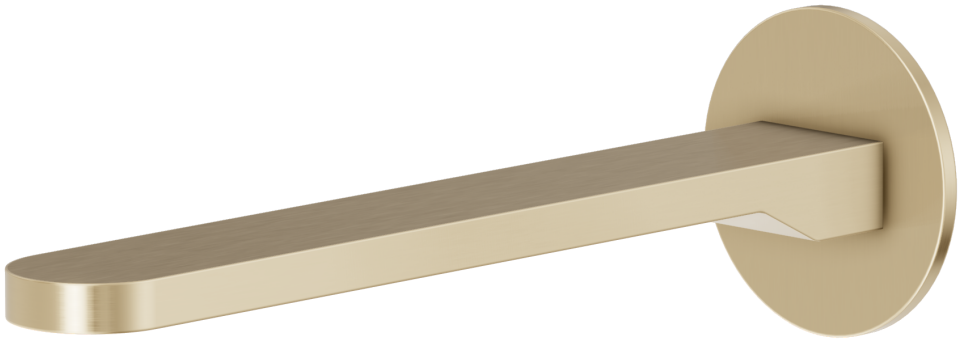

SMOOTH AND CONTROLLED WATER FLOW

SERENO MINIMAL WALL BASIN MIXER TAP

AT A GLANCE

BEST FOR

Everyday bathrooms for those who value space, flow and detail

FEEL

Precise temperature and flow control

INSTALLATION

Wall-mounted, plumber required

rainco

Front View · Side View

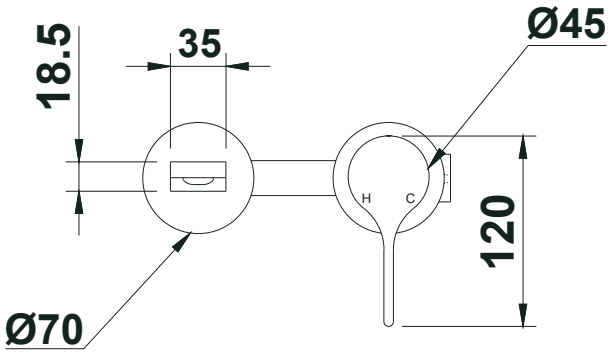

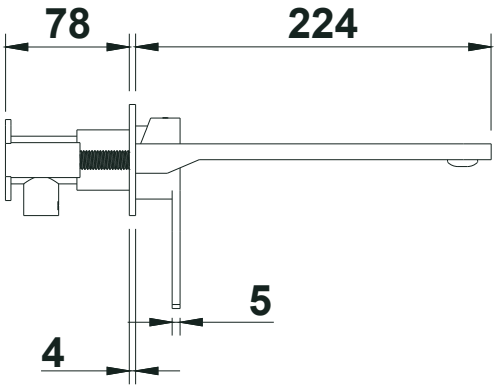

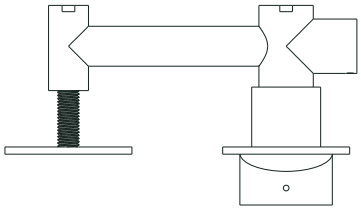

Specifications

MATERIAL

Lead-free **SS304** stainless steel

CARTRIDGE

Citec ceramic cartridge · **Ø35 mm**

FLOW RATE

4.5 L/min · WELS 6 Star

PRESSURE RANGE

50–800 kPa

TEMPERATURE

4–80 °C

CONNECTIONS

Standard **G1/2”**

MOUNTING

Wall-mounted · cut-out **45mm** · taphandle **22mm**

DIMENSIONS

Diameter **70 mm** · spout **224 mm** · handle **Ø45 mm** · spout **Ø22 mm**

rainco

Exploded View

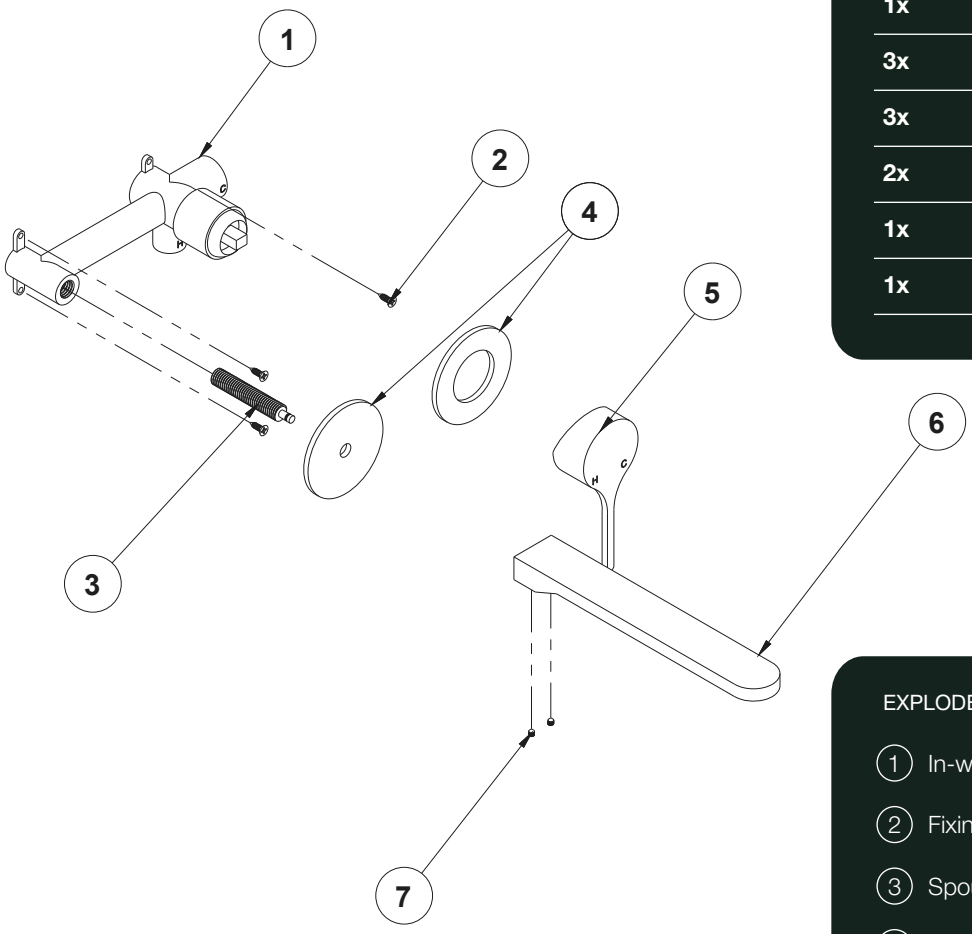

What's in the box

INCLUDED

1x	In-wall Body
1x	Tap Handle
1x	Spout
2x	Cover Rings
1x	Spout Connector Screw
3x	Fixing Screws
3x	Hollow Wall Anchors
2x	Spare Grub Screws
1x	Aerator Remover Tool
1x	Mini Hex Wrench

EXPLODED VIEW

1. In-wall Body
2. Fixing Screws
3. Spout Connecter Screw
4. Cover Rings
5. Temperature Control Handle
6. Spout
7. Grub Screws

Finish Options

Antique Brass	**Brushed Nickel**	**Brushed Brass**	**Brushed Copper**	**Gun Metal**
AEA	AEA	PVD	PVD	PVD

rainco

Installation Guide

PLUMBER REQUIRED AS/NZS 3500

01

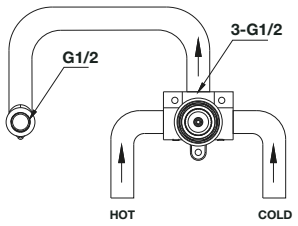

Install in-wall body

Install the in-wall mixer body into the proposed wall position. Connect hot and cold water pipework to the body inlets.

02

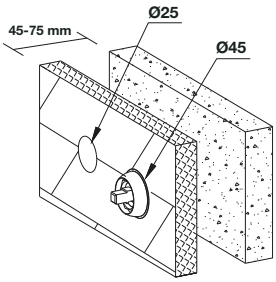

Prepare wall openings

Ensure the wall openings are cut to the correct size before final finishing.

03

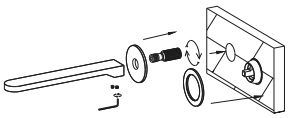

Complete wall finish

Do not seal or tile until the product has been fully tested. Once testing is successful, complete the wall finish or tiling.

04

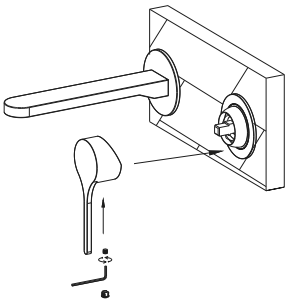

Install trim and handle

Fit the cover rings, install the spout and handle, then secure using the grub screws with the supplied Allen key.

FINAL CHECK · TURN ON & TEST

Turn on the water supply and test for correct operation and leaks. Do not seal or tile until the tap is fully tested.

Care & Maintenance

MILD SOAP & WARM WATER

Clean with mild soap and warm water.

SOFT CLOTH ONLY

Use soft cloth only.

NO CITRUS, BLEACH OR ABRASIVE CLEANERS

These can damage the surface and affect longevity

Compliance

WATERMARK CERTIFIED

AS/NZS 3718

WELS APPROVED

6 STAR · 4.5 L/MIN

NCC LEAD-FREE

LESS THAN 0.25%

INSTALLATION STANDARD

AS/NZS 3500.1 & 3500.4