



EFFORTLESS WATER CONTROL

SERENO MINIMAL WALL MIXER

AT A GLANCE



BEST FOR

Everyday bathroom
and shower



CONNECTIONS

Standard G1/2






FEEL

Precise temperature
control



INSTALLATION

Wall-mounted,
plumber required

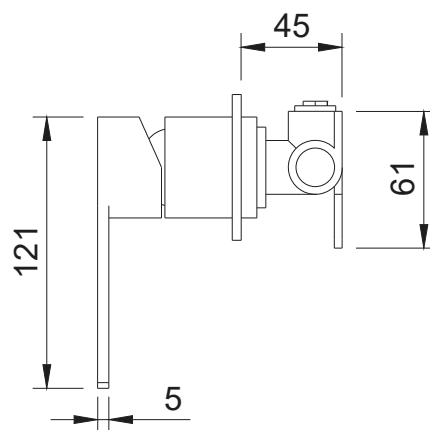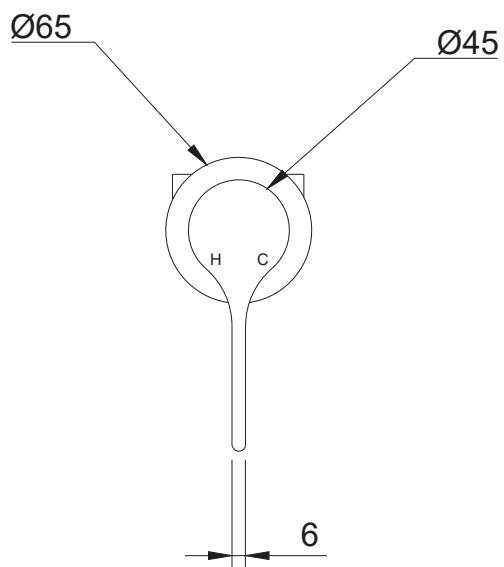

Specifications



MATERIAL

Lead-free **SS304** stainless steel



CARTRIDGE

Citec ceramic cartridge



PRESSURE RANGE

50–800 kPa



TEMPERATURE

4–80 °C



CONNECTIONS

Standard **G1/2"**




MOUNTING

Wall-mounted · cut-out **Ø45 mm**



DIMENSIONS

Height **180 mm** · handle **121 mm**

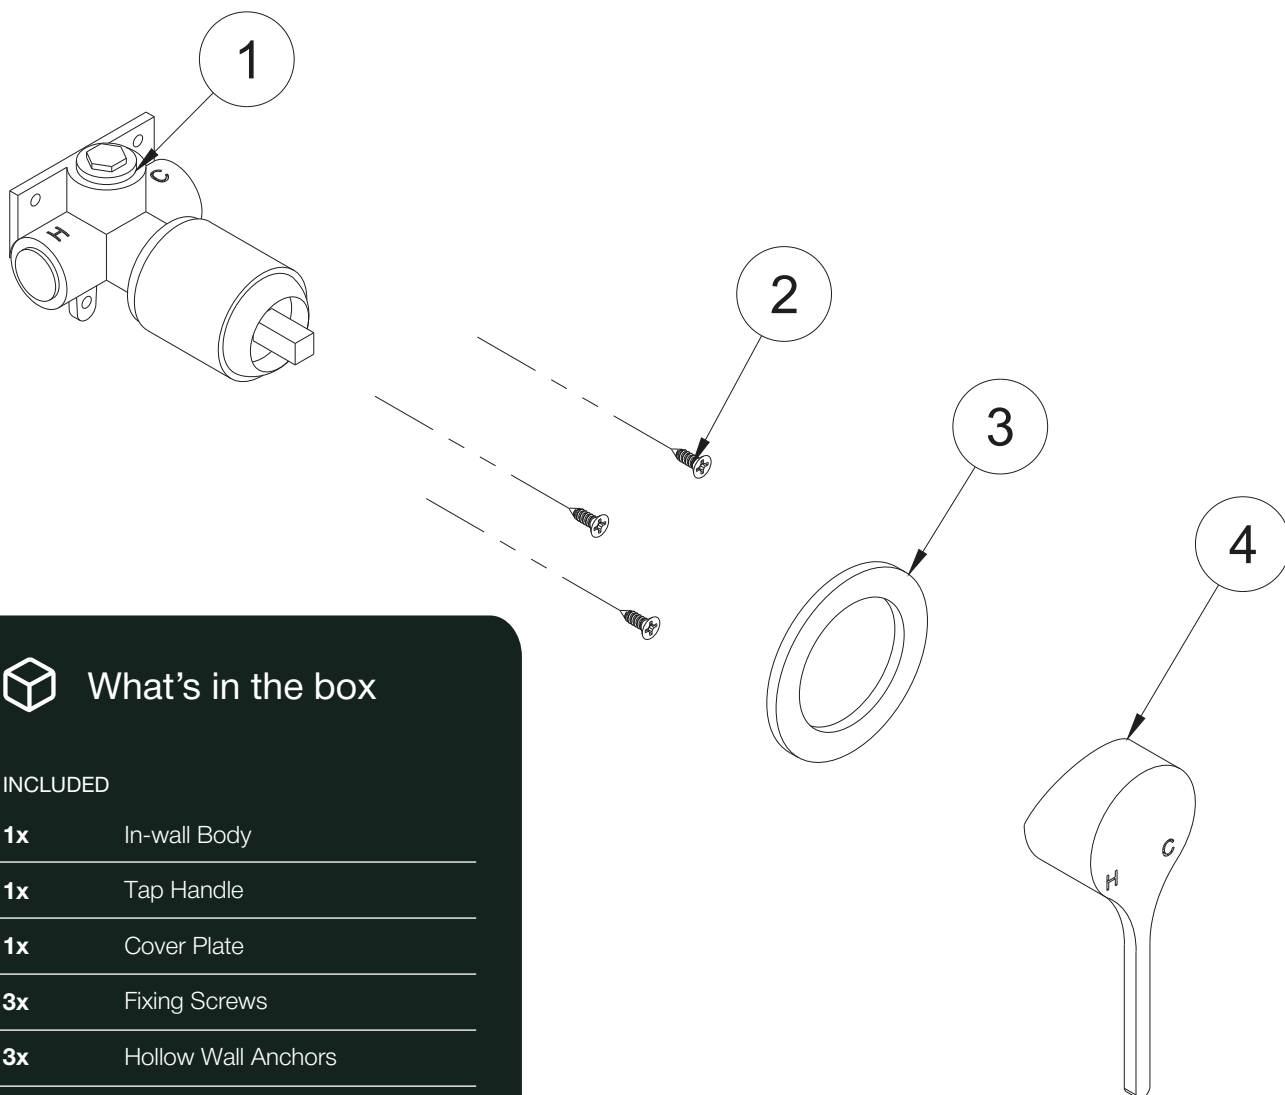

What's in the box

INCLUDED

1x In-wall Body

1x Tap Handle

1x Cover Plate

3x Fixing Screws

3x Hollow Wall Anchors

1x Spare Grub Screws

1x Mini Hex Wrench

EXPLODED VIEW

① In-wall Body

② Fixing Screws

③ Cover Ring

④ Temperature Control Handle

Finish Options



Antique Brass
AEA



Brushed Nickel
AEA



Brushed Brass
PVD



Brushed Copper
PVD




Gun Metal
PVD

Installation Guide

PLUMBER REQUIRED AS/NZS 3500


01



Insert Body

Ensure the protective covers are on while doing this to avoid damages to the cartridge.


02



Connect Water Supply

Connect hot (left) and cold (right) water inlets. Turn on water supply and test to ensure correct operation and no leaks. (Please note LH & RH side is when viewing the product from the front).


03



Complete wall finish

Once testing is successful, proceed with wall finishing (e.g. tiling). Cut required openings to suit the mixer: Ø45mm.

04

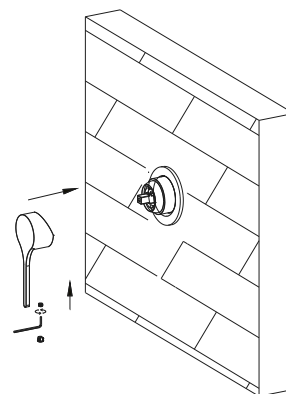

Install trim and handle

Fit the cover plate over the mixer body. Install the handle, then secure using the grub screws with an Allen key from underneath.



FINAL CHECK - TURN ON & TEST

Test the mixer again after installation to ensure correct operation and no leaks. Do not seal or tile until fully tested.

Care & Maintenance

KEEP THE FINISH



MILD SOAP & WARM WATER

Clean with mild soap and warm water.



SOFT CLOTH ONLY

Use soft cloth only.



NO CITRUS, BLEACH OR ABRASIVE CLEANERS

These can damage the surface and affect longevity.

Compliance

CERTIFIED



WATERMARK CERTIFIED

AS/NZS 3718



NCC LEAD-FREE

LESS THAN 0.25%



INSTALLATION STANDARD

AS/NZS 3500.1 & 3500.4