




REFINED SHAPE, FLEXIBLE FUNCTION

SERENO PULL DOWN KITCHEN MIXER TAP

AT A GLANCE

 BEST FOR Everyday kitchens, family use	 REACH 247mm for practical sink coverage	 HEIGHT Balanced for overhead clearance without dominating the space	 FEEL Smooth pull-down action with precise rinsing and cleaning	 INSTALLATION Bench-mounted, plumber required
---	--	--	---	---

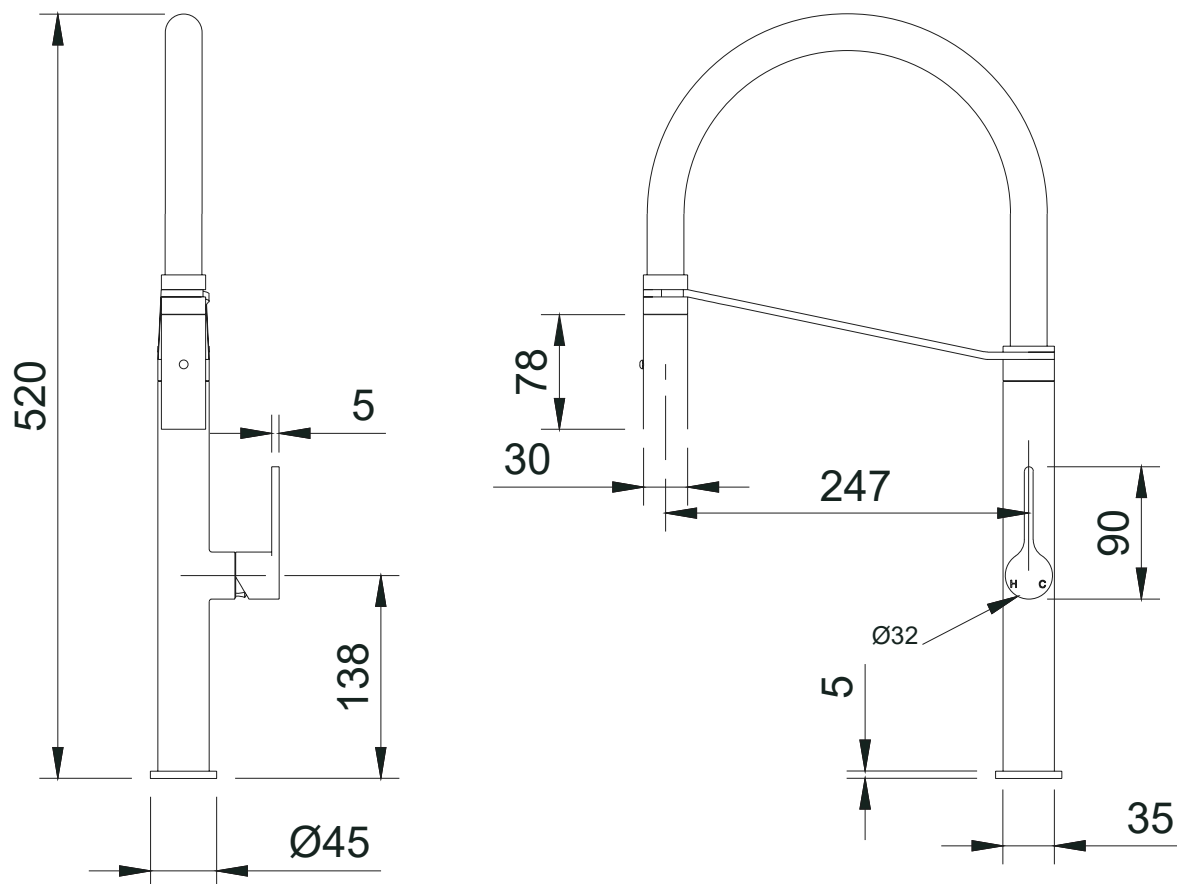

Specifications



MATERIAL

Premium **SS304** stainless steel



CARTRIDGE

Citec ceramic · **Ø33 mm**



FLOW RATE

6.5 L/min · WELS 4 Star



PRESSURE RANGE

50–800 kPa



TEMPERATURE

4–80 °C



CONNECTIONS

Standard **G1/2"**




MOUNTING

Bench-mounted · cut-out **Ø33 mm**



DIMENSIONS

Height **520** · reach **247** · base **Ø45 mm**

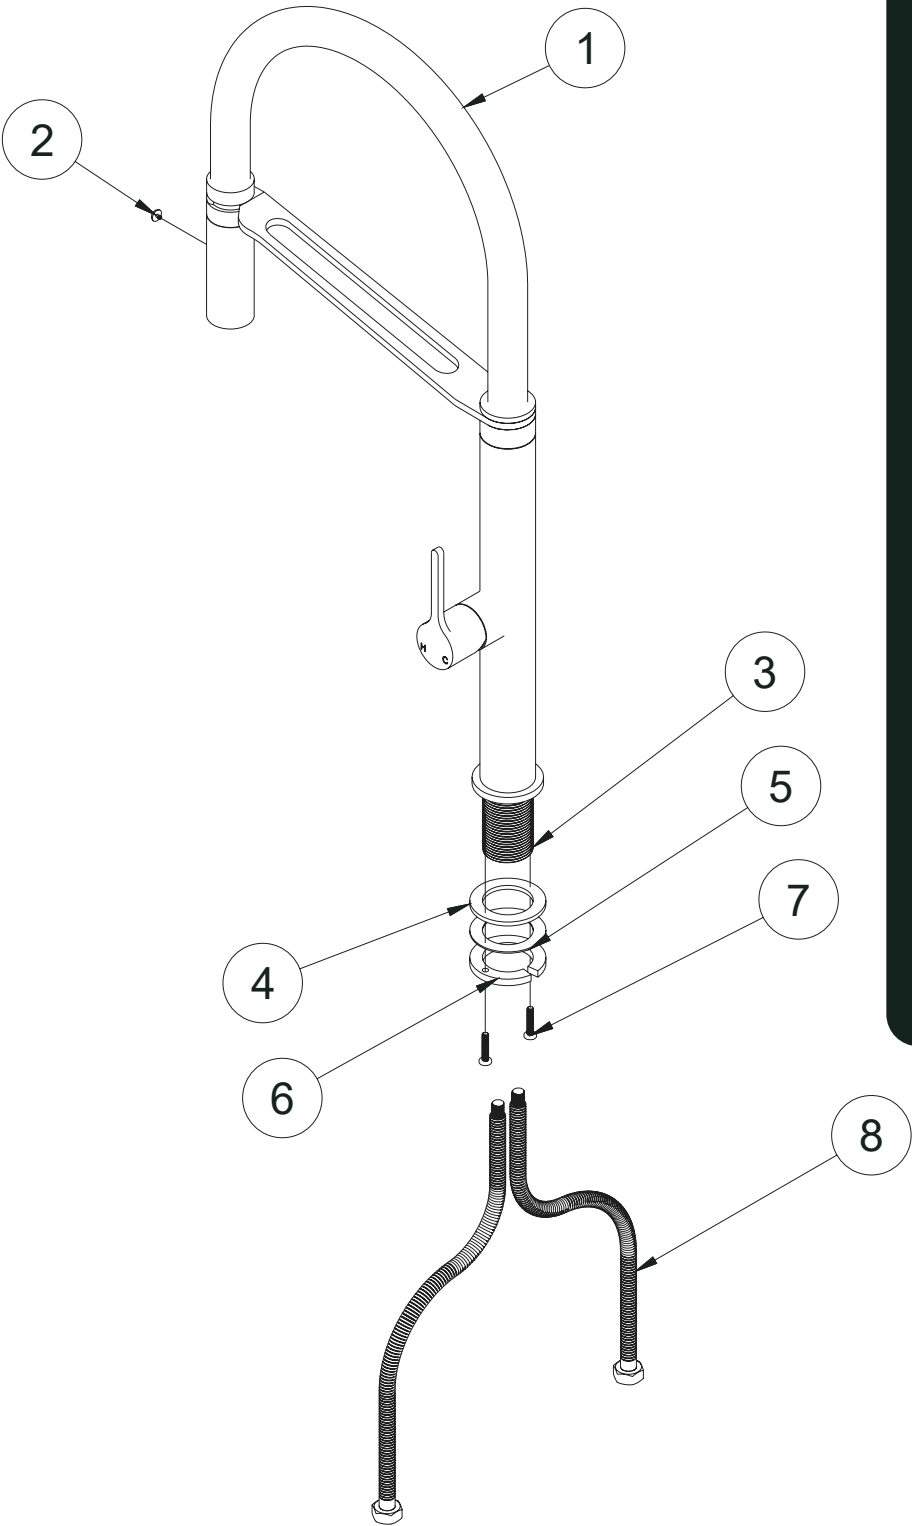

What's in the box

INCLUDED

- | | |
|----|-----------------|
| 1x | Pull-down Tap |
| 3x | Metal Washers |
| 1x | Hot Metal Hose |
| 1x | Cold Metal Hose |
| 2x | Screws |

EXPLODED VIEW

- | | |
|---|----------------------|
| ① | Gooseneck Tap |
| ② | Spray Function Screw |
| ③ | Thread Tube |
| ④ | Rubber |
| ⑤ | Washer |
| ⑥ | Mount Nut |
| ⑦ | Fixing Screws |
| ⑧ | Flexible Hose |

Finish Options



Antique Brass
AEA



Brushed Nickel
AEA



Brushed Brass
PVD



Brushed Copper
PVD




Gun Metal
PVD

Installation Guide

PLUMBER REQUIRED AS/NZS 3500


01

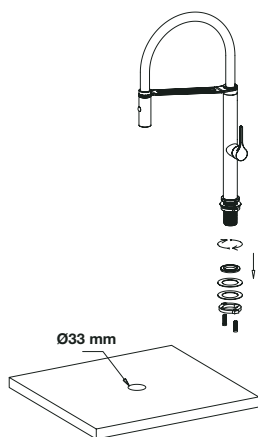

Prepare cut-out

Drill the Ø33 hole and feed the hoses through the benchtop.


02

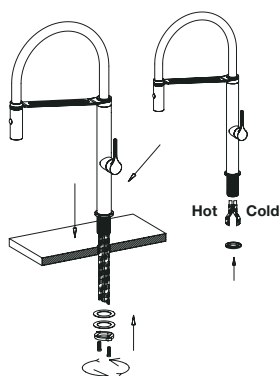

Seat the mixer

Lower it in from above and align; mind hot and cold sides.


03

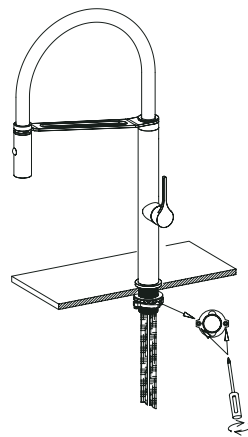

Secure underneath

Fit the washers and tighten the mount nut from below.

04

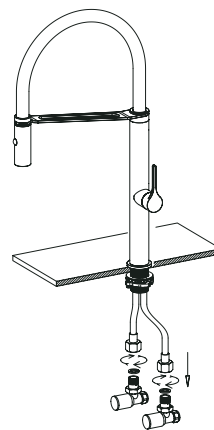

Connect water

Hoses to the isolation valves — hot to hot, cold to cold.



FINAL CHECK · TURN ON & TEST

Slowly open the isolation valves and check every joint for leaks, then run hot and cold and test the pull-down action. Do not seal or tile until the tap is fully tested.

Care & Maintenance

KEEP THE FINISH



MILD SOAP & WARM WATER

Clean gently to keep the surface bright.



SOFT CLOTH ONLY

Never use scourers or rough pads.



NO CITRUS, BLEACH OR ABRASIVES

These damage the finish and shorten its life.

Compliance

CERTIFIED



WATERMARK CERTIFIED

AS/NZS 3718



WELS APPROVED

4 STAR · 6.5 L/MIN



NCC LEAD-FREE

LESS THAN 0.25%



INSTALLATION STANDARD

AS/NZS 3500.1 & 3500.4