

COMPACT AND QUIETLY REFINED

SERENO SHORT BASIN MIXER TAP

AT A GLANCE



BEST FOR

Smaller or tighter
spaces



HEIGHT

Designed for
low-profile elegance
and practical
clearance




FEEL

Precise temperature
and flow control. Small
in scale, strong in
character



INSTALLATION

Bench-mounted,
plumber required

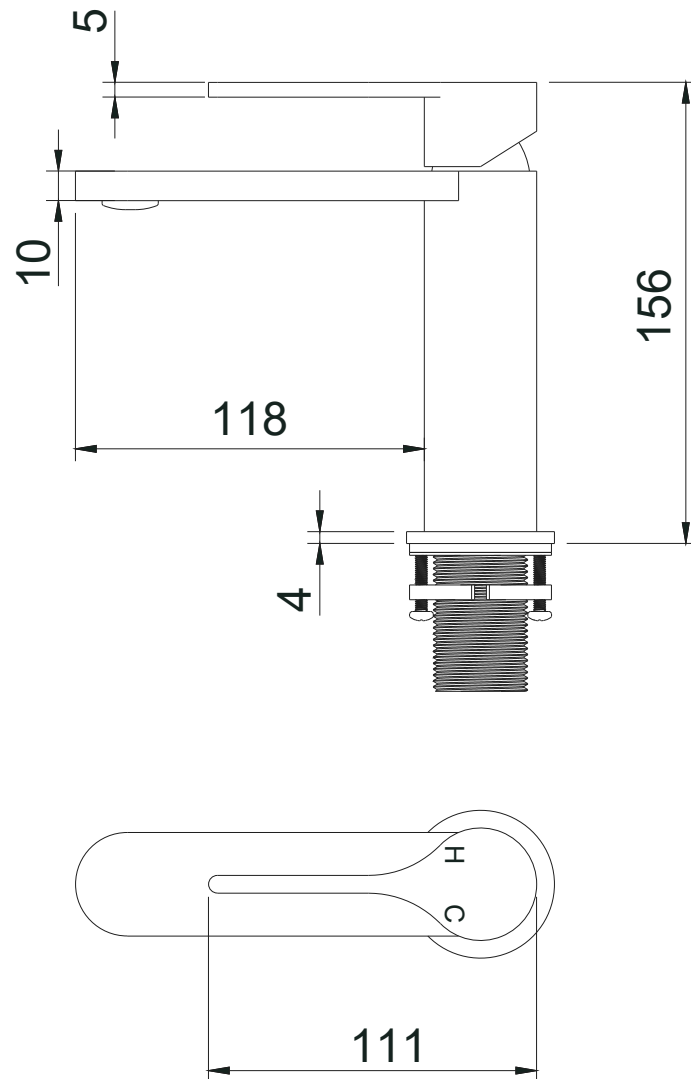

Specifications



MATERIAL

Lead-free **SS304** stainless steel



CARTRIDGE

Citec ceramic cartridge



FLOW RATE

4.5 L/min · WELS 6 Star



PRESSURE RANGE

50–800 kPa



TEMPERATURE

4–80 °C



CONNECTIONS

Standard **G1/2"**




MOUNTING

Bench-mounted · cut-out **Ø35-Ø38 mm**



DIMENSIONS

Height **156 mm** · spout **10 mm** · length **118 mm** · body **Ø35 mm**

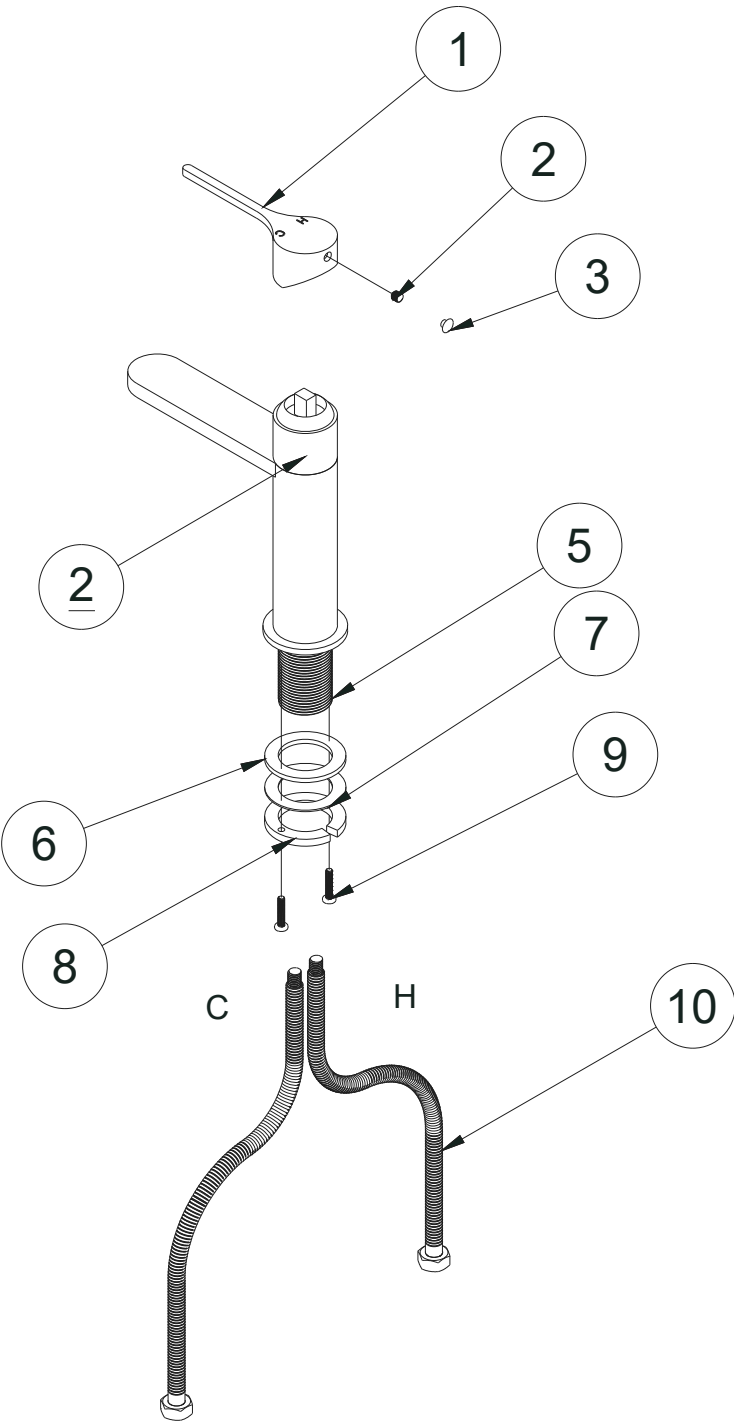

 What's in the box

INCLUDED

1x	Short Basin Mixer Tap
1x	Hot Flexi Hose
1x	Cold Flexi Hose
1x	Rubber
1x	Washer
1x	Mount Nut
2x	Screws
1x	Aerator Remover Tool
1x	Spare Grub Screw

EXPLODED VIEW

- ① Temperature Control Handle
- ② Grub Screw
- ③ Threaded Cover Cap
- ④ Cartridge
- ⑤ Thread Tube
- ⑥ Rubber
- ⑦ Washer
- ⑧ Mount Nut
- ⑨ Fixing Screws
- ⑩ Flexi Hose

Finish Options



Antique Brass
AEA



Brushed Nickel
AEA



Brushed Brass
PVD



Brushed Copper
PVD




Gun Metal
PVD

Installation Guide

PLUMBER REQUIRED AS/NZS 3500


01

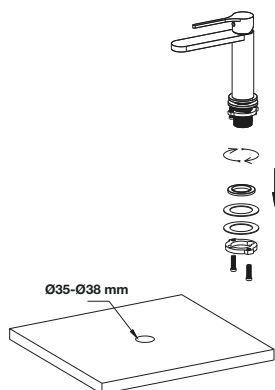

Prepare cut-out

Drill a Ø35-Ø38 mm tap hole in the benchtop or basin. Flush the pipework before installation to remove debris and impurities.


02

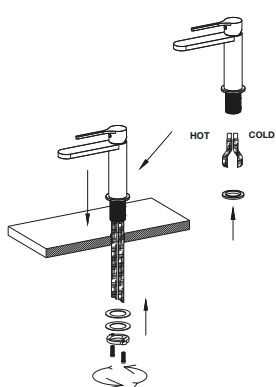

Position the mixer

Position the mixer over the installation hole. From below, feed the hoses through and secure the mixer using the mounting sleeve, ensuring the handle is correctly aligned.


03

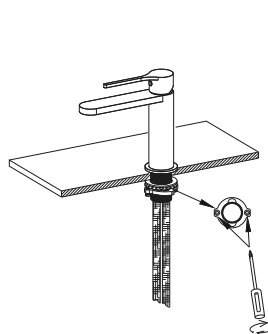

Secure underneath

Tighten all fixing components to secure the mixer firmly in place.

04

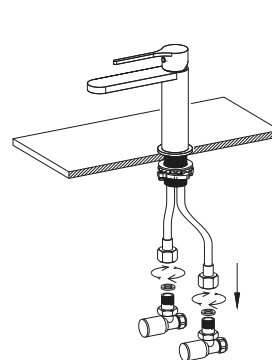

Connect water

Connect hot water to the left inlet and cold water to the right inlet, when viewing the product from the front.



FINAL CHECK · TURN ON & TEST

Turn on the water supply and test for correct operation and leaks. Do not seal or tile until the tap is fully tested.

Care & Maintenance

KEEP THE FINISH



MILD SOAP & WARM WATER

Clean with mild soap and warm water.



SOFT CLOTH ONLY

Use soft cloth only.



NO CITRUS, BLEACH OR ABRASIVE CLEANERS

These can damage the surface and affect longevity.

Compliance

CERTIFIED



WATERMARK CERTIFIED

AS/NZS 3718



WELS APPROVED

6 STAR · 4.5 L/MIN



NCC LEAD-FREE

LESS THAN 0.25%



INSTALLATION STANDARD

AS/NZS 3500.1 & 3500.4