
INSTALLATION MANUAL

SB182-1-124

RainCo Tapware

The installation instructions apply to the following products:

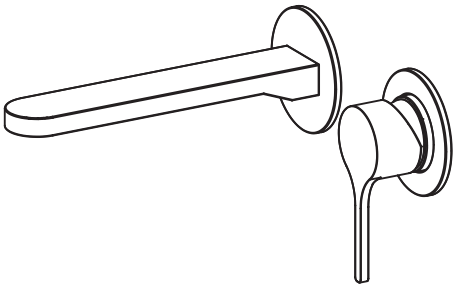

Important Information

It is recommended that this product is installed by a qualified professional.

Please remove all packaging and check this product to ensure it has not been damaged or any parts are missing.

Before installing please make sure this is the correct model and you have all the parts required for installation and usage.

The printed picture is for reference only, this product is according to the actual goods.

Please check all the accessories are present.

Always read these instructions carefully and keep for future reference

Operating Information

Operating Pressure
Minimum operating pressure 0.5 bar
Maximum operating pressure 8 bar

Pre-Installation

1. Before installing the mixer, flush through the pipe work to remove any debris & other impurities that can enter the tap.

2. Turn off water supply at the isolation valves before commencing with work.

3. To avoid damage, please make sure the water inlet flexible pipes are not twisted when in use.

Warranty Requirements

For full warranty terms and conditions please visit the warranty section of our website.
Please pay attention to the below. Failure to do so will void your warranty:

1. Do not use acid cleansers
2. Do not use abrasive cleansers
3. Do not use abrasive cloths

Maintenance & Care

To avoid damage it is necessary to consider the below guidelines.

1. To clean the mixers surface use clean hot soapy water. ONLY use soft fabric cloths.

2. DO NOT use cleaning solutions that contain hydrochloric acid, formic acid, concentrated caustic soda, chlorine or acetic acid as they can cause considerable damage.

3. DO NOT use any coarse cleaning powders or brushed to clean the mixer.

4. If there is irregular water pressure & water flow is reduced, please check if the spout isclean, if not brush the spout after vinegar soaking.

Installation

Get all accessories ready according to picture (1) the left-hand side is for hot water
inlet, and the right-hand side for cold water inlet. (Please note LH & RH side is when viewing the product from the front).

1. Install the body of the mixer into the proposed position in the wall. Connect the Hot and Cold water pipework to body inlets & fix body into place. After fixing the mixer, turn it on to check if there is any leaking.

2. Please ensure all holes are drilled to the correct size in diagram 2.

3. Fixing the plate & connectors into the main body of the product.

4. Using the Allen key provided to tighten the spout and the head to the control valve connectors.

Installation steps

