



ELEVATE AND BALANCE

## SERENO TALL BASIN MIXER TAP

AT A GLANCE



BEST FOR

Everyday  
bathrooms



HEIGHT

Designed to balance  
out spaces





FEEL

Precise temperature  
and flow control. Small  
in scale, strong in  
character



INSTALLATION

Bench-mounted,  
plumber required

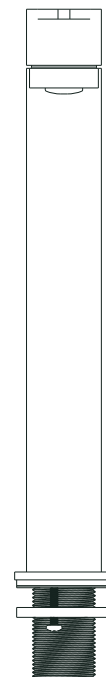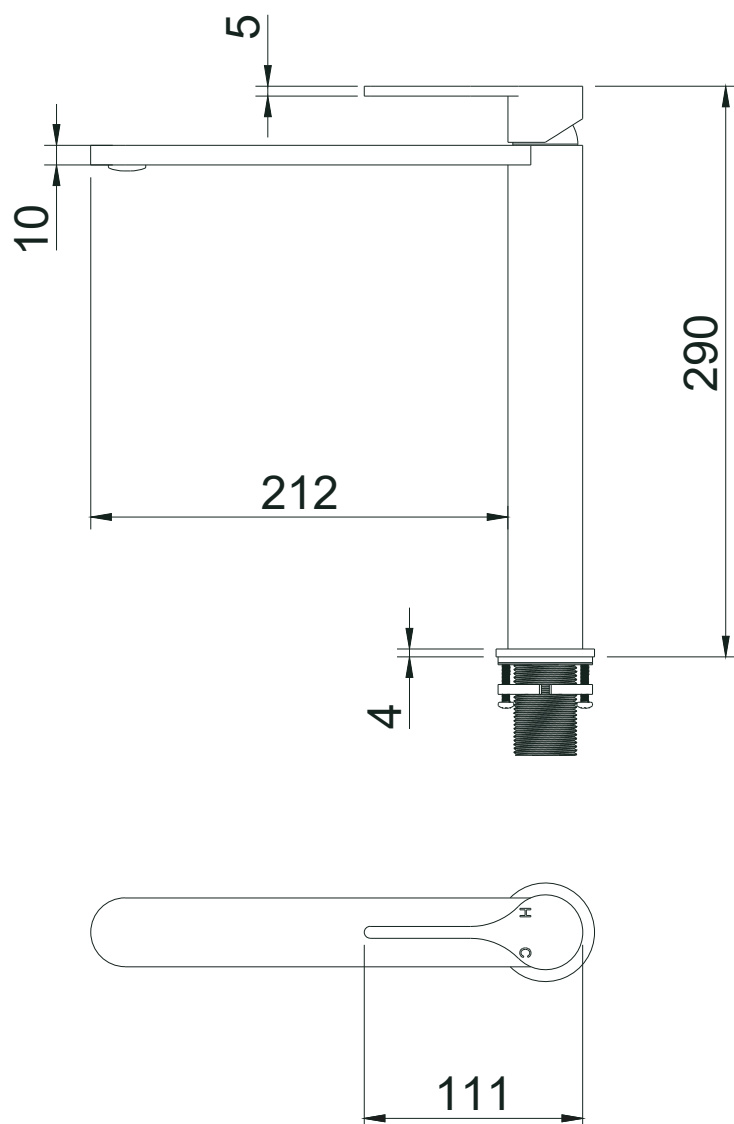

## Specifications



### MATERIAL

Lead-free **SS304** stainless steel



### CARTRIDGE

Citec ceramic cartridge



### FLOW RATE

**4.5 L/min** · WELS 6 Star



### PRESSURE RANGE

**50–800 kPa**



### TEMPERATURE

**4–80 °C**



### CONNECTIONS

Standard **G1/2"**




### MOUNTING

Bench-mounted · cut-out **Ø35-Ø38 mm**



### DIMENSIONS

Height **290 mm** · spout **10 mm** · length **212 mm** · body **Ø38 mm**

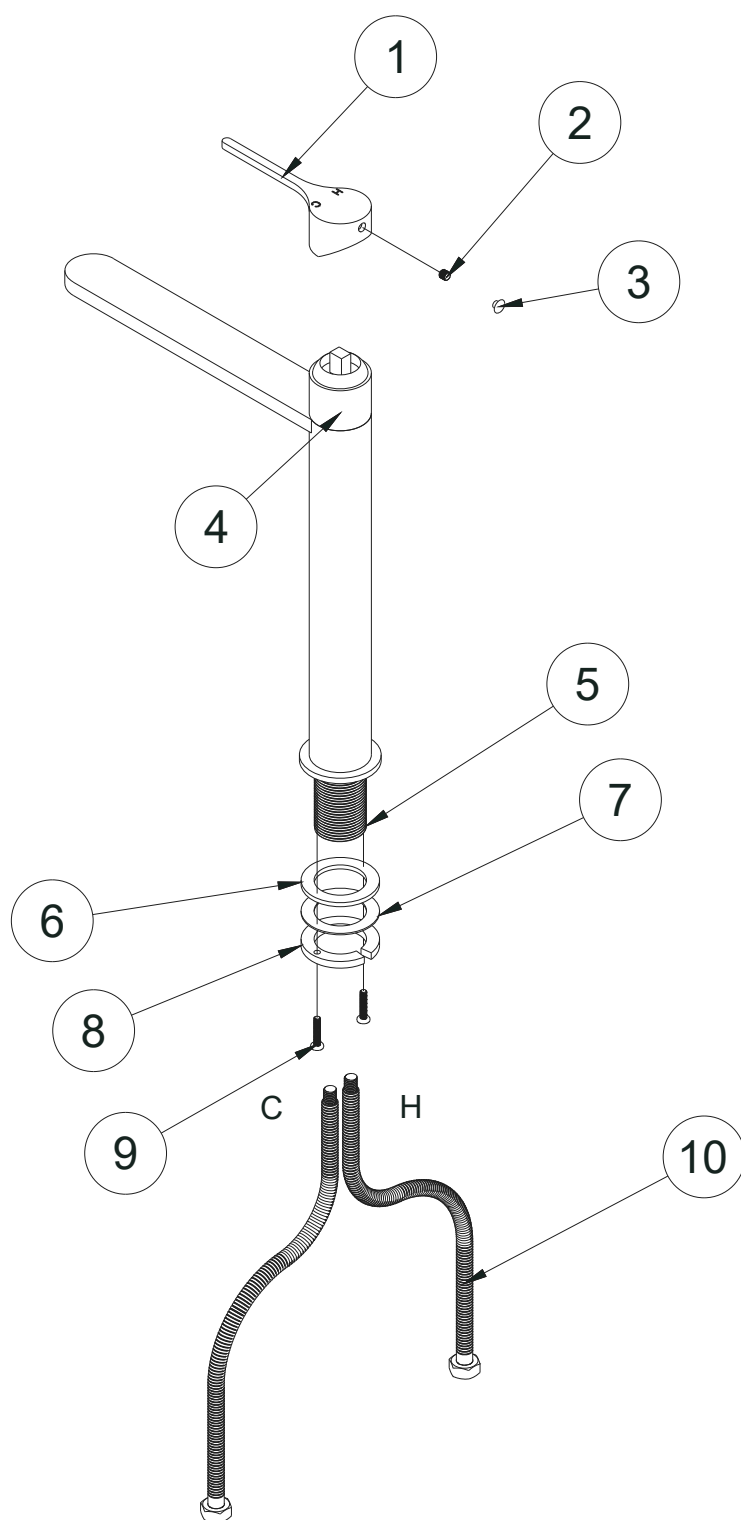

## What's in the box

### INCLUDED

|           |                      |
|-----------|----------------------|
| <b>1x</b> | Tall Basin Mixer Tap |
| <b>1x</b> | Hot Flexi Hose       |
| <b>1x</b> | Cold Flexi Hose      |
| <b>1x</b> | Rubber               |
| <b>1x</b> | Washer               |
| <b>1x</b> | Mount Nut            |
| <b>2x</b> | Screws               |
| <b>1x</b> | Aerator Remover Tool |
| <b>1x</b> | Spare Grub Screw     |

### EXPLODED VIEW

- ① Temperature Control Handle
- ② Grub Screw
- ③ Threaded Cover Cap
- ④ Cartridge
- ⑤ Thread Tube
- ⑥ Rubber
- ⑦ Washer
- ⑧ Mount Nut
- ⑨ Fixing Screws
- ⑩ Flexi Hose

## Finish Options



**Antique Brass**  
AEA



**Brushed Nickel**  
AEA



**Brushed Brass**  
PVD



**Brushed Copper**  
PVD




**Gun Metal**  
PVD

## Installation Guide

PLUMBER REQUIRED AS/NZS 3500


01

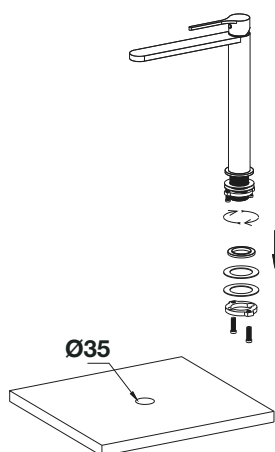

### Prepare cut-out

Drill a Ø35–Ø38 mm tap hole in the benchtop or basin.


02

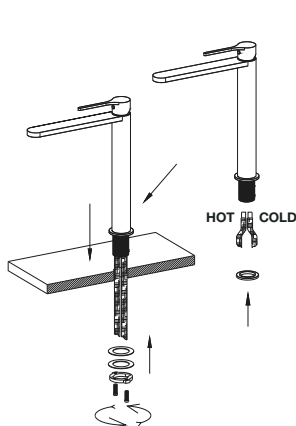

### Position the mixer

Position the mixer over the installation hole. From below, feed the hoses through and secure the mixer using the mounting sleeve, ensuring the handle is correctly aligned.


03

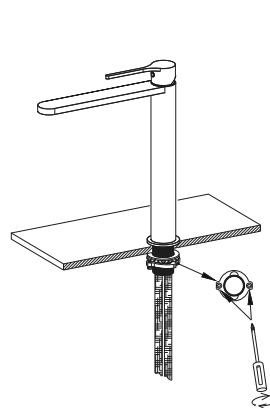

### Secure underneath

Tighten all fixing components to secure the mixer firmly in place.

04

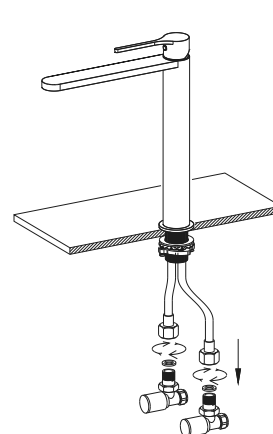

### Connect water

Connect hot water to the left inlet and cold water to the right inlet, when viewing the product from the front.



### FINAL CHECK · TURN ON & TEST

Turn on the water supply, allow the mixer to run and test for correct operation and leaks. Do not seal or tile until the tap is fully tested.

## Care & Maintenance

KEEP THE FINISH



MILD SOAP & WARM WATER

Clean with mild soap and warm water.



SOFT CLOTH ONLY

Use soft cloth only.



NO CITRUS, BLEACH OR ABRASIVE CLEANERS

These can damage the surface and affect longevity.

## Compliance

CERTIFIED



WATERMARK CERTIFIED

AS/NZS 3718



WELS APPROVED

6 STAR · 4.5 L/MIN



NCC LEAD-FREE

LESS THAN 0.25%



INSTALLATION STANDARD

AS/NZS 3500.1 & 3500.4