




SMOOTH AND CONTROLLED WATER FLOW

SERENO WALL BASIN MIXER TAP

AT A GLANCE

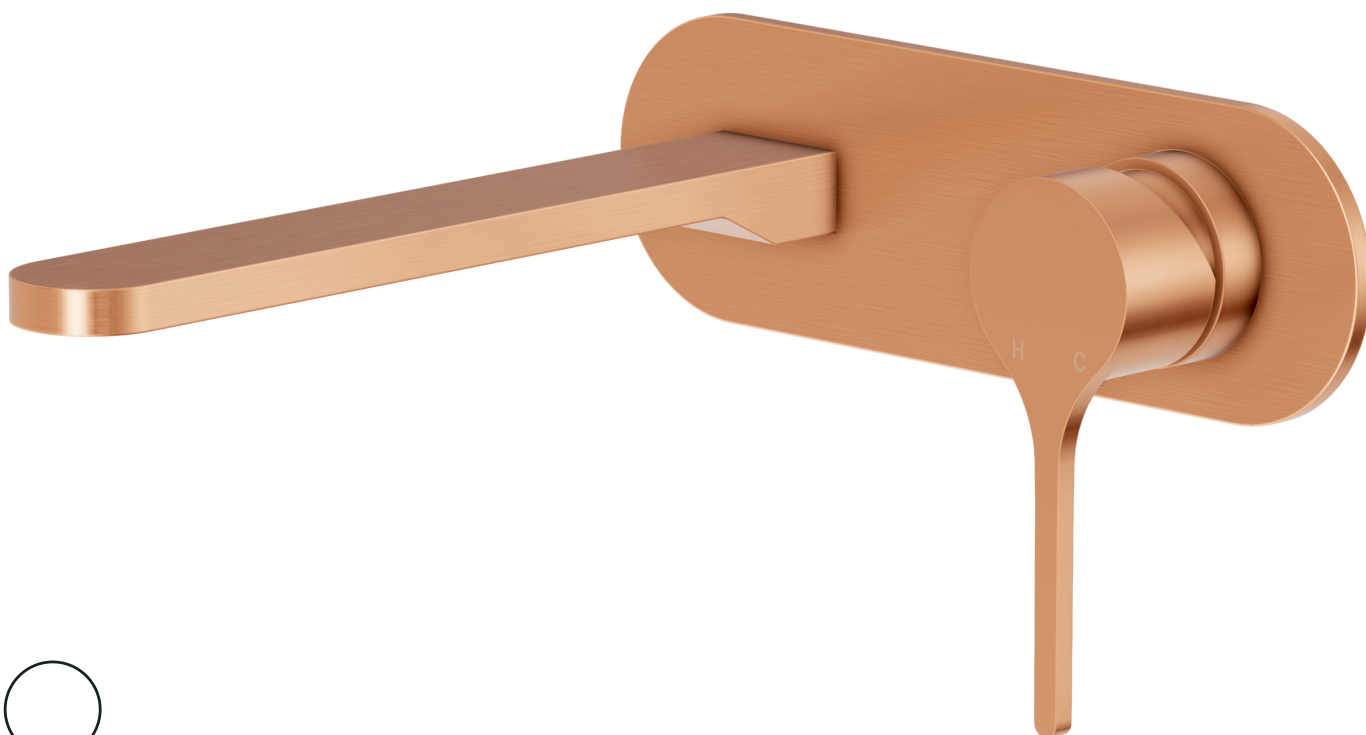

BEST FOR

Everyday bathrooms for those who value space, flow and detail



CONNECTIONS

Standard G1/2"




FEEL

Precise temperature and flow control



INSTALLATION

Wall-mounted, plumber required

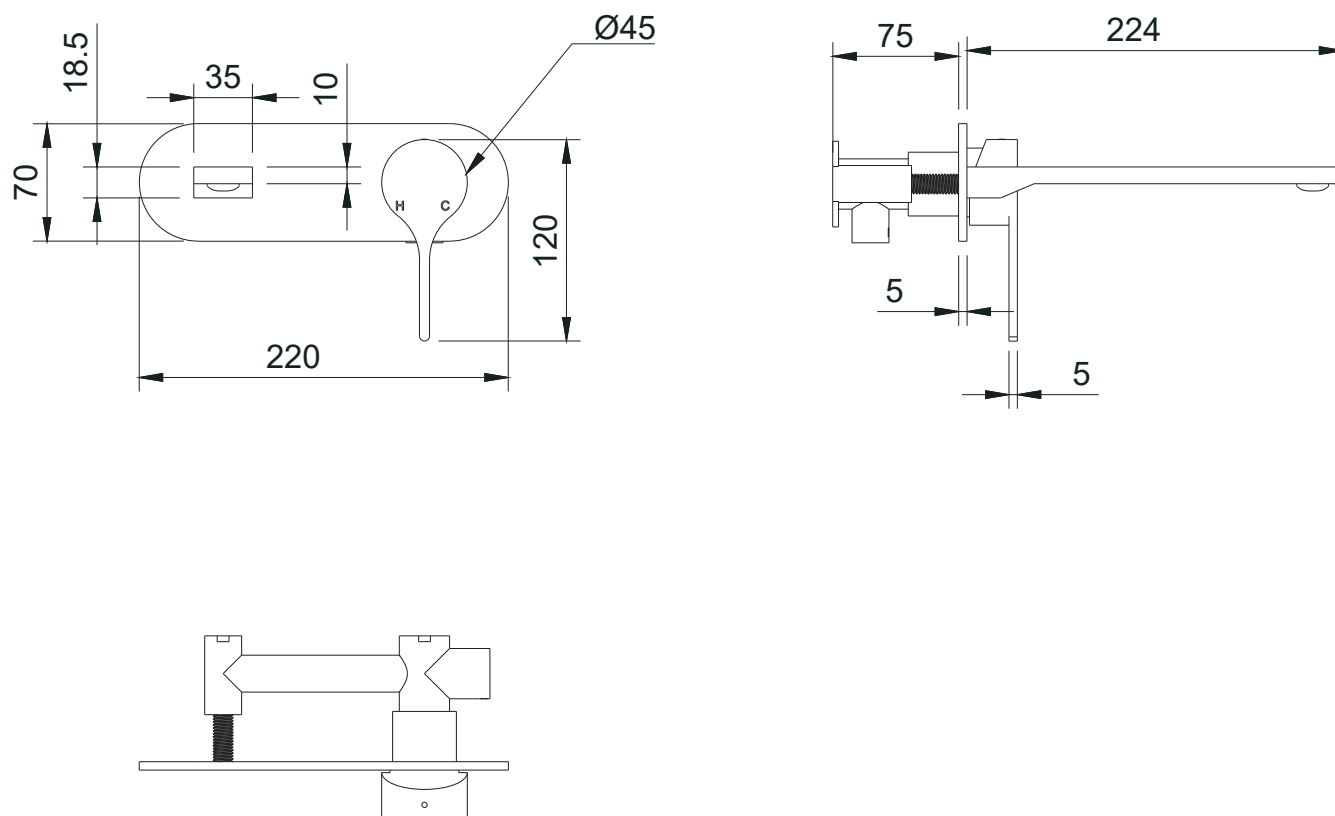

Specifications



MATERIAL

Lead-free **SS304** stainless steel



CARTRIDGE

Citec ceramic cartridge



FLOW RATE

4.5 L/min · WELS 6 Star



PRESSURE RANGE

50–800 kPa



TEMPERATURE

4–80 °C



CONNECTIONS

Standard **G1/2"**




MOUNTING

Wall-mounted · cut-out **45 mm** (tap) **22 mm** (spout)



DIMENSIONS

Cover plate **220 mm** · spout **224 mm**

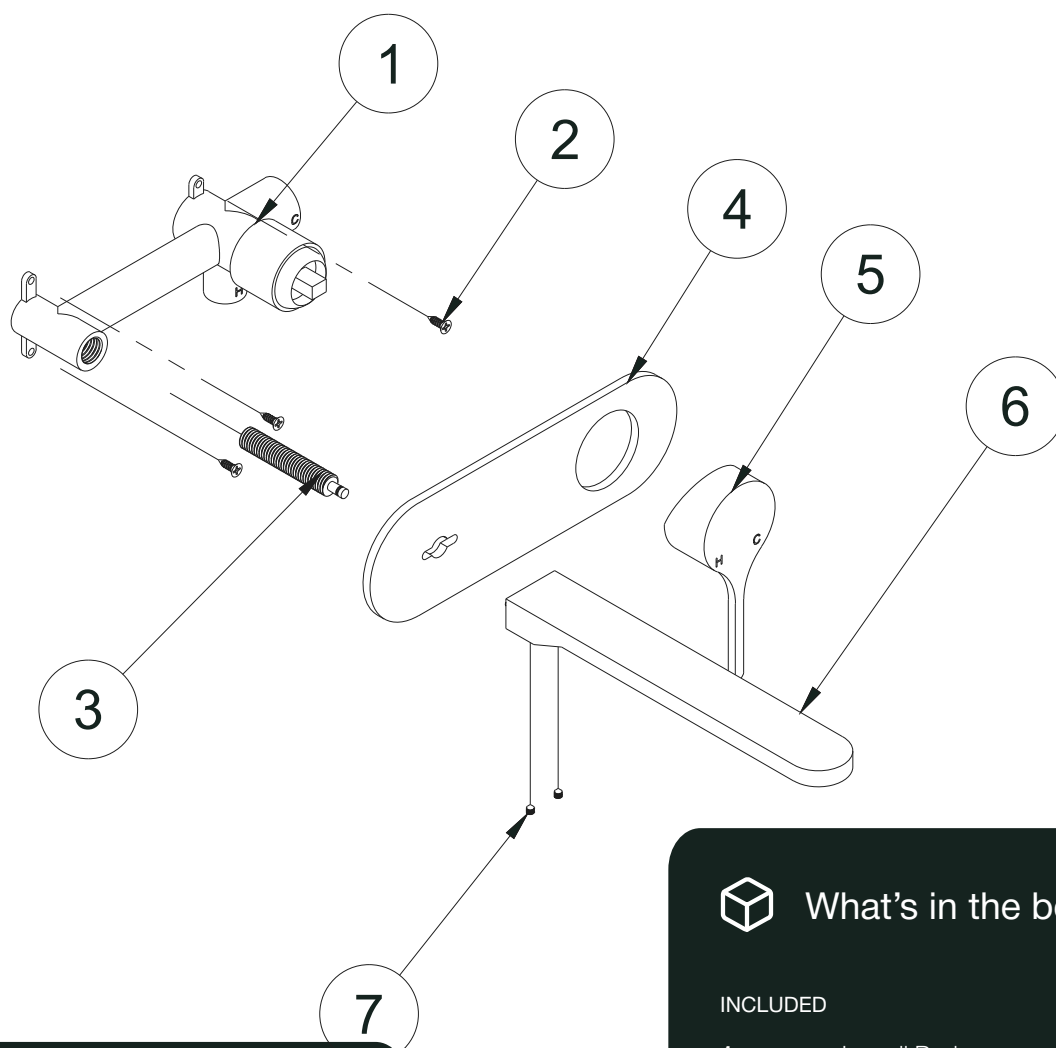

EXPLODED VIEW

- ① In-wall Body
- ② Fixing Screws
- ③ Spout Connector Screw
- ④ Cover Plate
- ⑤ Temperature Control Handle
- ⑥ Spout
- ⑦ Grub Screws



What's in the box

INCLUDED

- 1x** In-wall Body
- 1x** Tap Handle
- 1x** Spout
- 1x** Cover Plate
- 1x** Spout Connector Screw
- 3x** Fixing Screws
- 3x** Hollow Wall Anchors
- 2x** Spare Grub Screws
- 1x** Aerator Remover Tool
- 1x** Mini Hex Wrench

Finish Options



Antique Brass
AEA



Brushed Nickel
AEA



Brushed Brass
PVD



Brushed Copper
PVD




Gun Metal
PVD

Installation Guide

PLUMBER REQUIRED AS/NZS 3500


01



Insert Body

Ensure the protective covers are on while doing this to avoid damages to the cartridge

02




Connect Water Supply

Connect the hot water inlet from below and the cold water inlet from the right-hand side. Turn on the water supply and test..

Please note: below and right-hand side are when viewing the product from the front.


03



Complete wall finish

Once testing is successful, proceed with wall finishing (e.g. tiling). Cut required openings to suit the mixer: Ø45mm for the Tap Handle, Ø22mm for Spout.

04



Install trim and handle

Fit the cover plate over the mixer body. Install the handle, then secure using the grub screws with an Allen key from underneath.



FINAL CHECK · TURN ON & TEST

Turn on the water supply and test for correct operation and leaks. Do not seal or tile until the tap is fully tested.

Care & Maintenance

KEEP THE FINISH



MILD SOAP & WARM WATER

Clean with mild soap and warm water.



SOFT CLOTH ONLY

Use soft cloth only.



NO CITRUS, BLEACH OR ABRASIVE CLEANERS

These can damage the surface and affect longevity.

Compliance

CERTIFIED



WATERMARK CERTIFIED

AS/NZS 3718



WELS APPROVED

6 STAR · 4.5 L/MIN



NCC LEAD-FREE

LESS THAN 0.25%



INSTALLATION STANDARD

AS/NZS 3500.1 & 3500.4