



MINIMAL DESIGN, SECURE SUPPORT

SHOWER GLASS CLAMP

AT A GLANCE



BEST FOR

Connecting a frameless shower door directly to a fixed glass panel




MATERIAL

Crafted from Stainless Steel 304



INSTALLATION

-

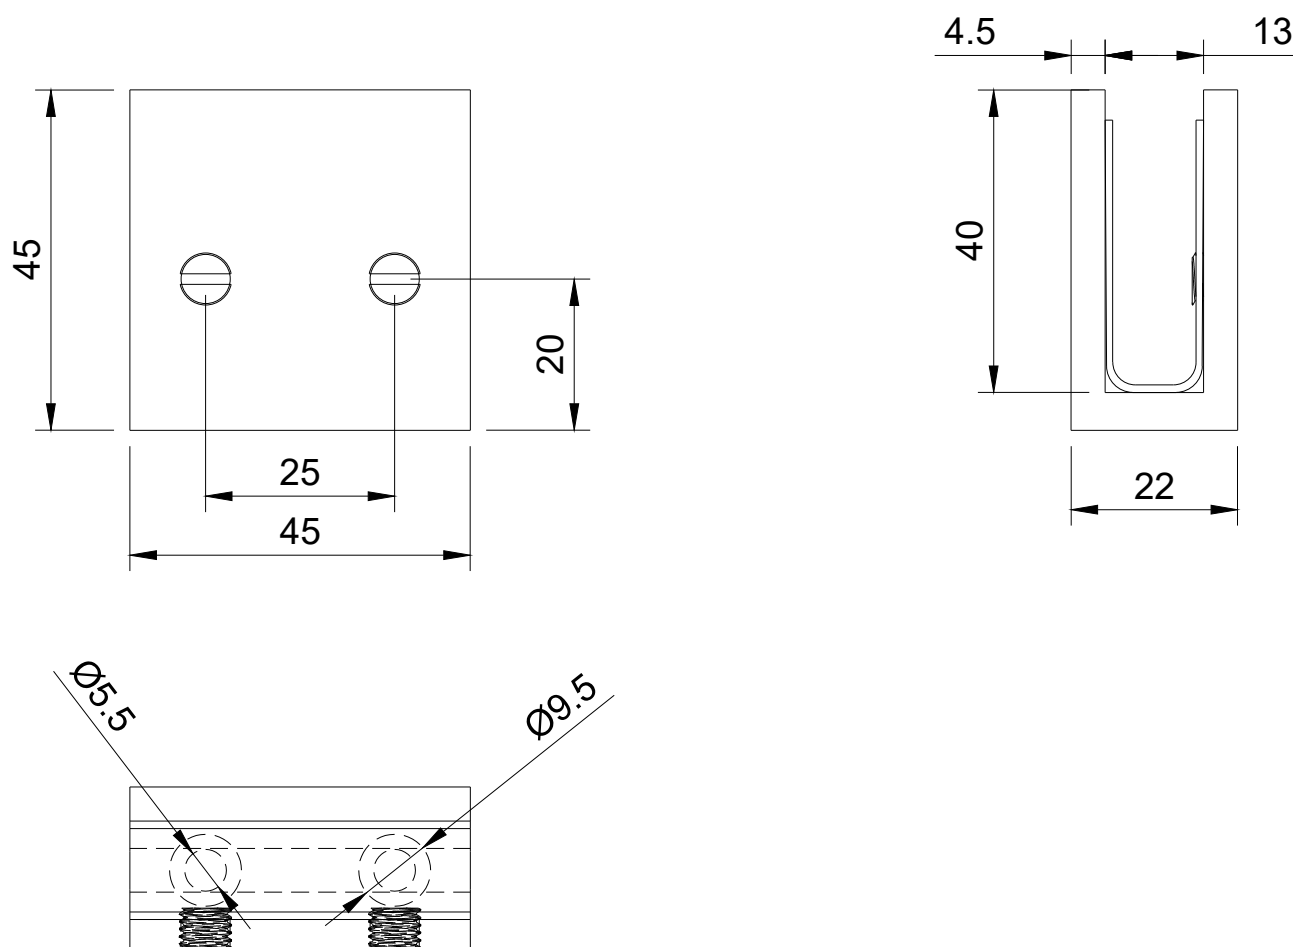

Specifications



MATERIAL

Stainless **304** Steel



GLASS

Suitable glass Flat or curved toughened safety glass · Stated glass thickness **8–12 mm** · **Glass retention** Two clamp screws



MOUNTING

Two structural wall fixings



REQUIRED WALL

Solid or suitably reinforced structure



THICKNESS

Clamp body thickness **4.5 mm**



INTERNAL GLASS

Internal glass opening **13 mm**




FIXING-HOLE

Fixing-hole centres **25 mm** · Fixing-hole height **20 mm** · Through-hole diameter **$\varnothing 5.5$ mm**



DIMENSIONS

Overall size **45×45 mm** · Overall depth **22 mm** · Counterbore diameter **$\varnothing 9.5$ mm**

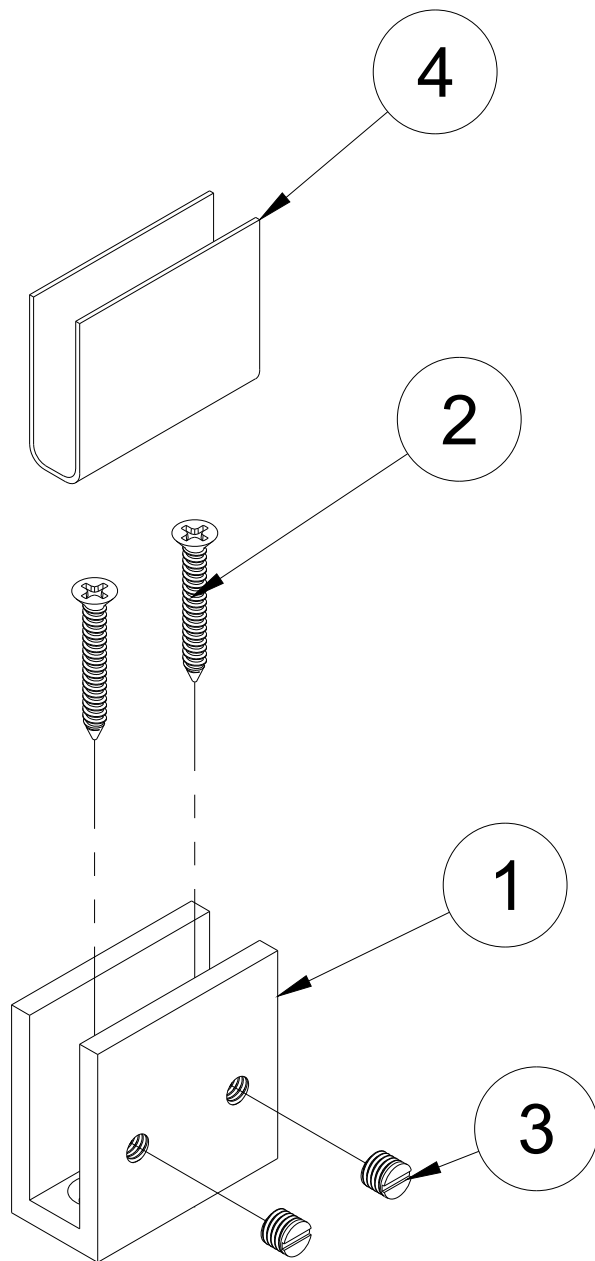

What's in the box

INCLUDED

1x	Glass clamp body
1x	Protective glass gasket
2x	Wall mounting screws
2x	Glass clamp screws

EXPLODED VIEW

- ① Glass clamp body
- ② Wall mounting screws
- ③ Glass clamp screws
- ④ Protective glass gasket

Finish Options



Antique Brass
AEA



Brushed Nickel
AEA



Brushed Brass
PVD



Brushed Copper
PVD



Gun Metal
PVD

Installation Guide

PLUMBER REQUIRED AS/NZS 3500

01 Mark the position

Position the clamp and mark the two wall fixing holes. Confirm the supporting surface is solid, plumb and suitable for the glass load.

02 Fix the clamp body

Drill the holes using a suitable bit and install appropriate structural fixings. Secure the clamp body to the wall.

03 Position the glass

Place the protective gasket inside the clamp and support the glass in its final position. Ensure there is no direct metal-to-glass contact.

04 Secure the glass

Insert and tighten both clamp screws evenly. Do not overtighten or place uneven pressure on the glass.



FINAL CHECK - TURN ON & TEST

Confirm the glass is plumb, stable and correctly seated within the clamp.

Care & Maintenance



MILD SOAP & WARM WATER

Clean with mild soap and warm water.



SOFT CLOTH ONLY

Use soft cloth only.



NO CITRUS, BLEACH OR ABRASIVE CLEANERS

These can damage the surface and affect longevity

Compliance



WATERMARK CERTIFIED

AS/NZS 3718



WELS APPROVED



NCC LEAD-FREE

LESS THAN 0.25%



INSTALLATION STANDARD

AS/NZS 3500.1 & 3500.4