rainco



EVERYDAY STORAGE, REFINED DESIGN

SINGLE TOWEL RAIL

AT A GLANCE

BEST FOR

Hanging and airing a full-size bath towel

MATERIAL


Crafted from Stainless Steel 304

INSTALLATION

Wall mounted

rainco

Front View · Side View

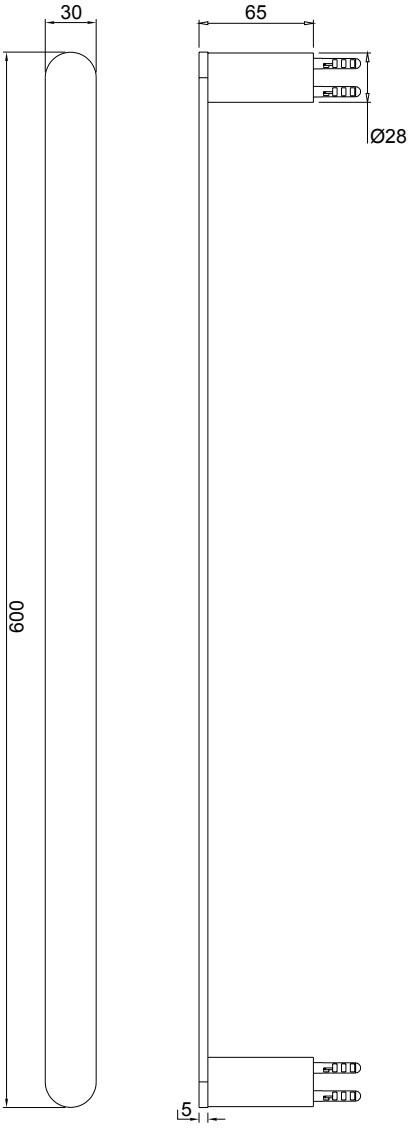

Specifications

MATERIAL

Stainless **304** Steel

MOUNTING


Concealed wall fixings

DIMENSIONS

Overall length **600 mm** · Rail width **30 mm** · Wall projection **65 mm**

rainco

Exploded View

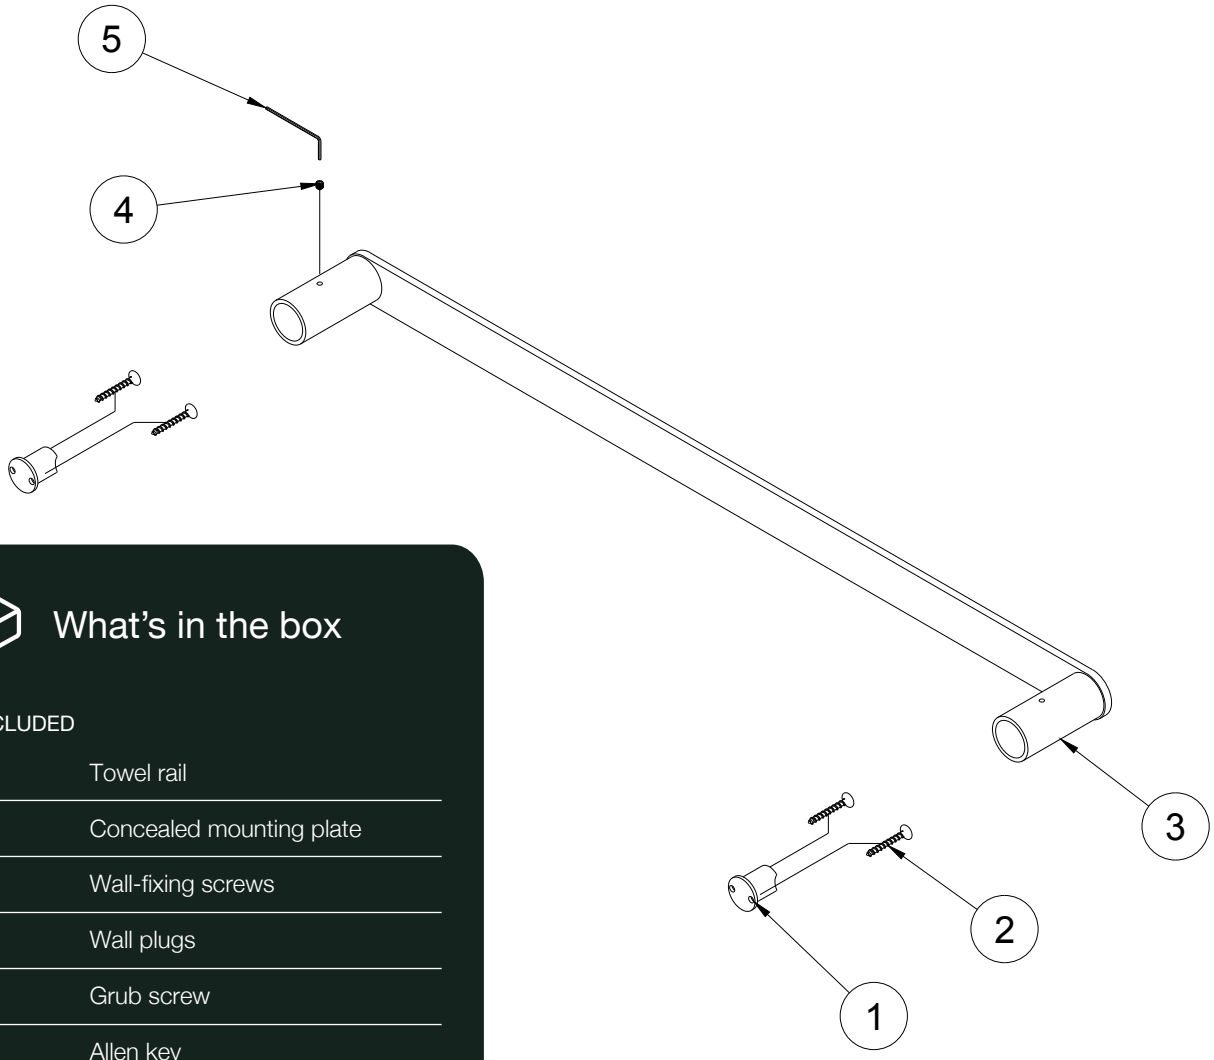

What's in the box

INCLUDED

1x	Towel rail
2x	Concealed mounting plate
4x	Wall-fixing screws
4x	Wall plugs
2x	Grub screw
1x	Allen key

EXPLODED VIEW

1. Concealed mounting plate
2. Wall fixing screws
3. Towel rail
4. Grub screw
5. Allen Key

Finish Options


Antique Brass	**Brushed Nickel**	**Brushed Brass**	**Brushed Copper**	**Gun Metal**
AEA	AEA	PVD	PVD	PVD

rainco

Installation Guide

PLUMBER REQUIRED AS/NZS 3500

01



Mark the position

Choose the installation height and check for concealed services. Remove the mounting plate using the supplied Allen key.


02



Drill the holes

Hold the mounting plate against the wall, mark the fixing holes and drill using a suitable bit.


03



Secure the plate

Insert suitable wall plugs and screw the mounting plate securely to the supporting wall.

04



Fit the towel rail

Position the hook over the mounting plate and tighten the concealed grub screw. Check that it is straight and secure.

FINAL CHECK · DISCLAIMER

Do not place weight on the towel rail until every fixing is secure.

Care & Maintenance

MILD SOAP & WARM WATER

Clean with mild soap and warm water.

SOFT CLOTH ONLY

Use soft cloth only.

NO CITRUS, BLEACH OR ABRASIVE CLEANERS

These can damage the surface and affect longevity

Compliance

WATERMARK CERTIFIED

-

WELS APPROVED

-

NCC LEAD-FREE

LESS THAN 0.25%

INSTALLATION STANDARD

AS/NZS 3500.1 & 3500.4