




REFINED FINISH, EFFORTLESS FLOW

TILE INSERT FLOOR WASTE

AT A GLANCE

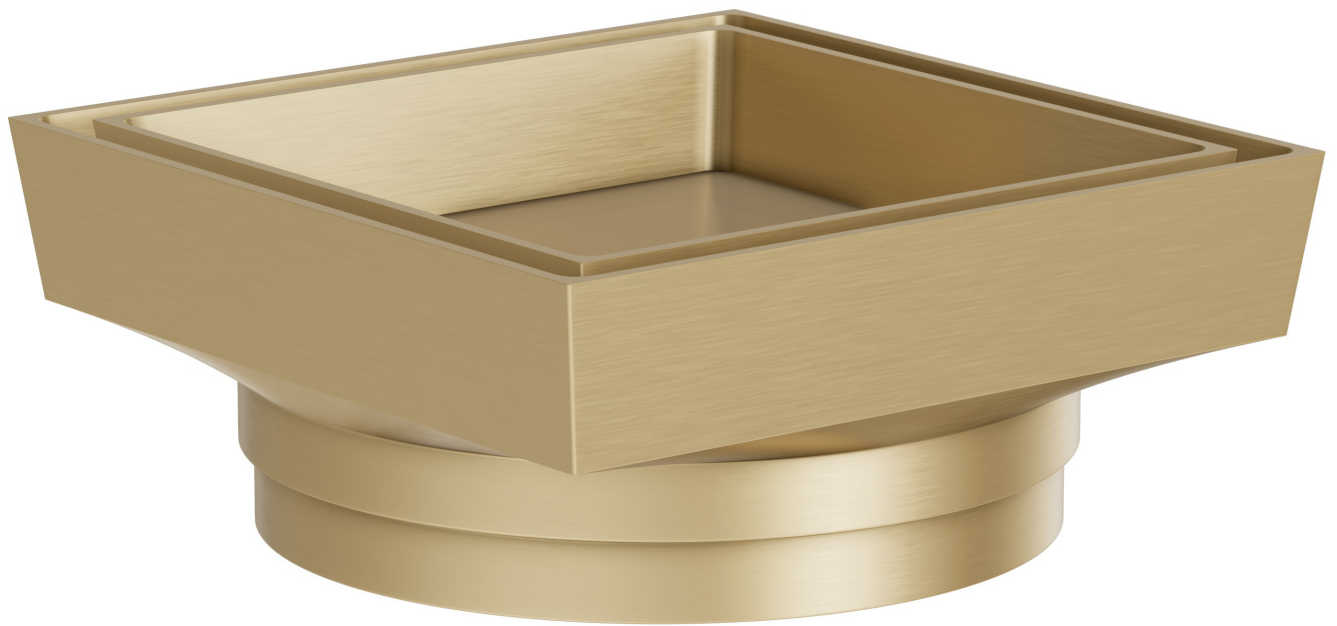

BEST FOR

Showers,
Bathroom floors
and laundry floors




MATERIAL

Crafted from Stainless
Steel 304



INSTALLATION

Floor mounted

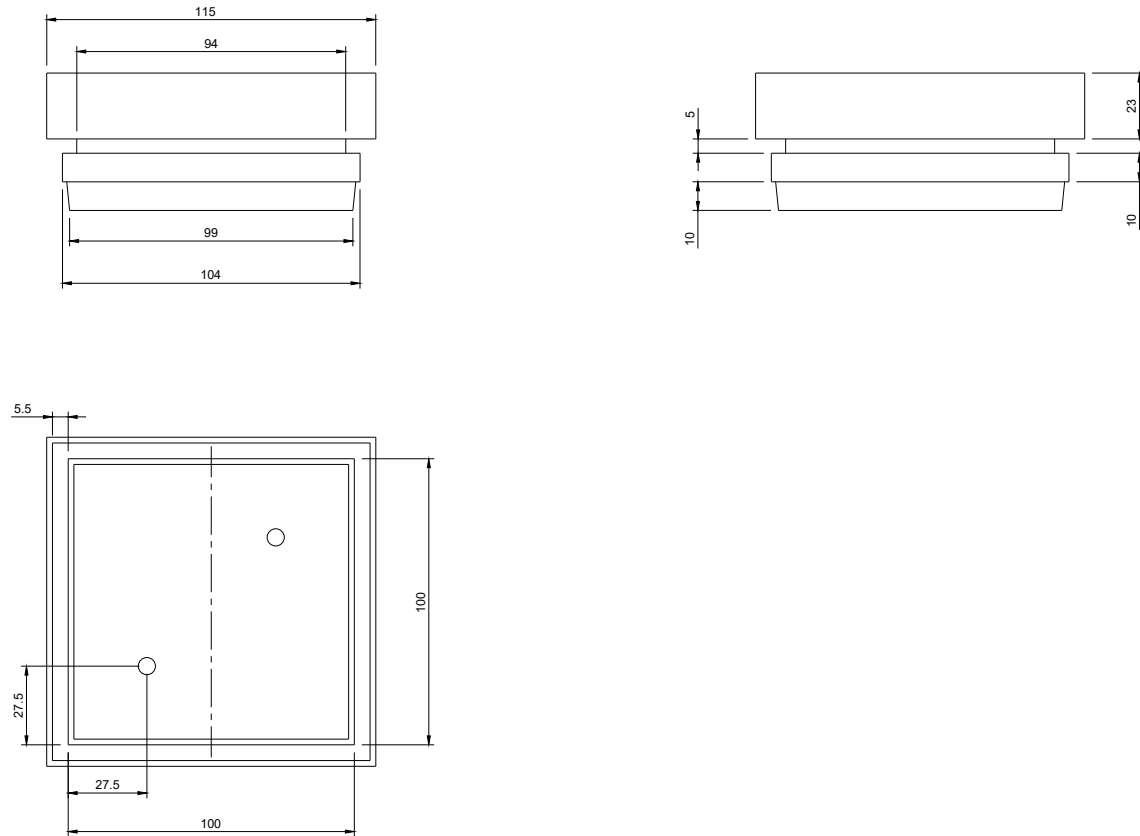

Specifications



MATERIAL


Stainless **304** Steel



DIMENSIONS

Fits 100 x 100 x 10 mm tile insert

Dimension **115x115x48 mm**

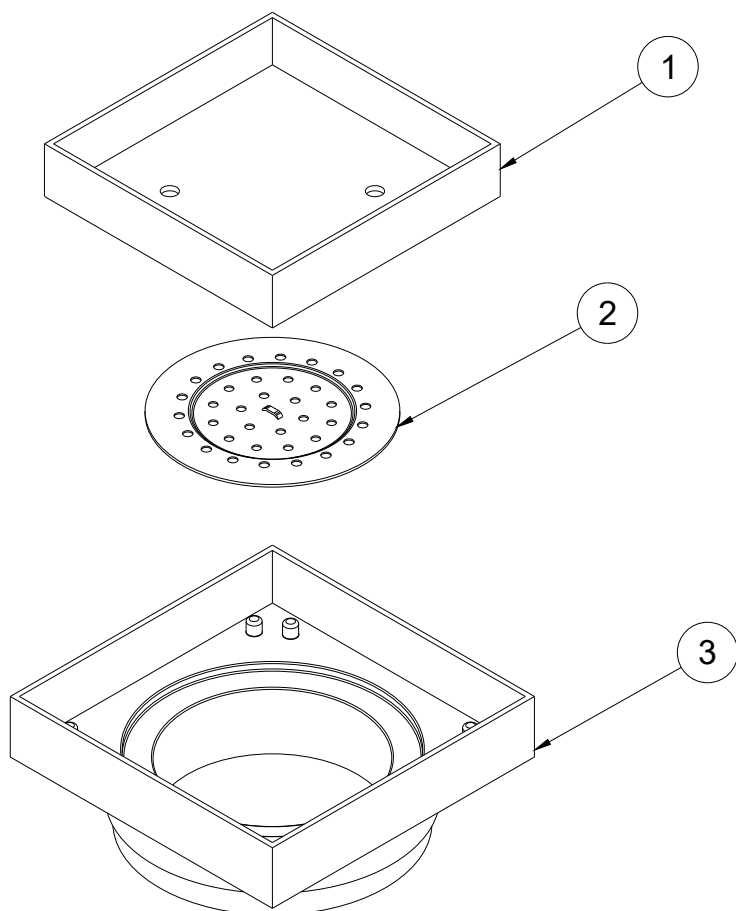

What's in the box

INCLUDED

1x	Tile insert floor waste
1x	Removable tile insert tray
1x	Debris strainer
1x	Waste Body
1x	Installation Instructions

EXPLODED VIEW

- ① Removable tile insert tray
- ② Perforated debris strainer / hair catcher
- ③ Floor waste body and outlet base

Finish Options



Antique Brass
AEA



Brushed Nickel
AEA



Brushed Brass
PVD



Brushed Copper
PVD




Gun Metal
PVD

Installation Guide

PLUMBER REQUIRED AS/NZS 3500


01



Prepare the drain position

Confirm the floor opening and waste connection are correctly positioned and compatible with the floor-waste outlet.


02



Install and waterproof the base

Connect the floor-waste body to the drain outlet. Set it level with the finished floor height and complete the required waterproofing around the body.


03



Cut and install the tiles

Cut the surrounding floor tiles to fit neatly around the 100 x 100 mm floor-waste opening. Install the tiles with the required fall toward the waste.

04



Fit the insert tray

Cut a tile piece to fit inside the removable tray and secure it using a suitable adhesive. Fit the debris strainer, place the tray into the floor-waste body and rotate it 90° to lock it in position.



FINAL CHECK - TURN ON & TEST

Confirm that the tray is secure, the surrounding tiles drain toward the waste and water flows freely without leaking around the waterproofed connection.

Care & Maintenance



MILD SOAP & WARM WATER

Clean with mild soap and warm water.



SOFT CLOTH ONLY

Use soft cloth only.



NO CITRUS, BLEACH OR ABRASIVE CLEANERS

These can damage the surface and affect longevity

Compliance



WATERMARK CERTIFIED

AS/NZS 3718



WELS APPROVED



NCC LEAD-FREE

LESS THAN 0.25%



INSTALLATION STANDARD

AS/NZS 3500.1 & 3500.4