rainco



SIMPLE FORM, LASTING IMPRESSION


WALL SHOWER HEAD AND ARM


AT A GLANCE

BEST FOR	FEEL	INSTALLATION
Showers for those who value design without compromise	Stead	Wall-mounted, plumber required


rainco

Front View · Side View

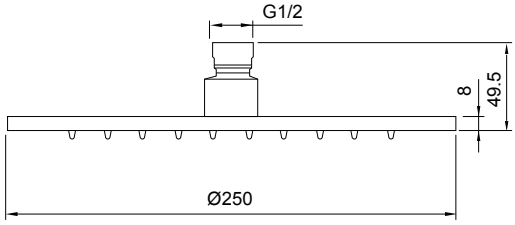

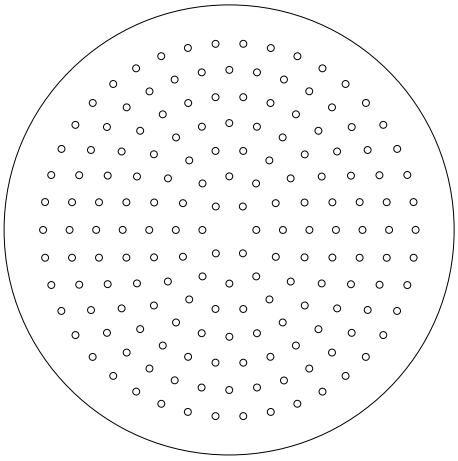

Size: Ø250*8 mm

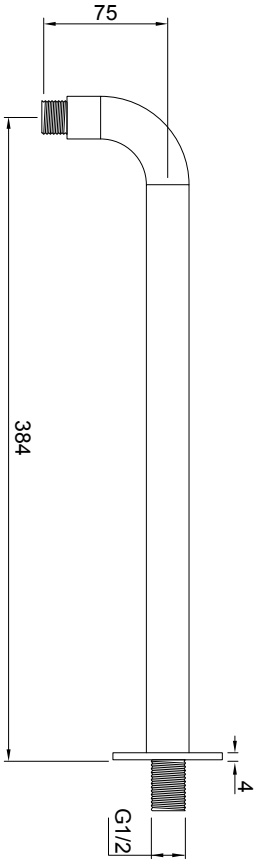

Specifications

MATERIAL
Solid **Brass**

TEMPERATURE
4–80 °C

FLOW RATE
8 L/min · WELS 3 Star

MOUNTING
Wall-mounted

PRESSURE RANGE
50–800 kPa

DIMENSIONS
Shower head diameter
Ø250 mm · Arm Length
380 mm

What's in the box

INCLUDED

1x	Wall Shower head
1x	Wall Shower arm
1x	Cover Ring

Finish Options


Antique Brass	**Brushed Nickel**	**Brushed Brass**	**Brushed Copper**	**Gun Metal**
AEA	AEA	PVD	PVD	PVD

rainco

Installation Guide

PLUMBER REQUIRED AS/NZS 3500


01

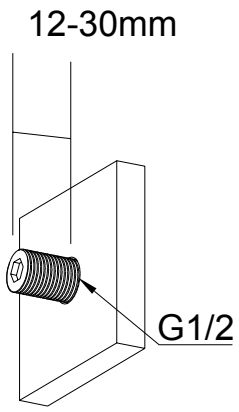

Prepare Parts

Prepare all accessories. Ensure the water outlet has the correct connection size: G1/2.


02

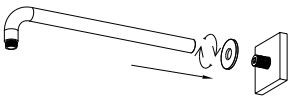

Install Shower Arm

Place the cover plate onto the wall-mounted shower arm before installation. Connect the shower arm to the water outlet and tighten securely.

03

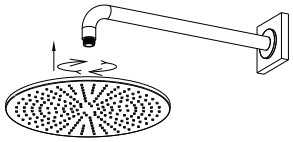

Install Rain Shower Head

Connect the rain shower head to the shower arm. Tighten securely and ensure the shower head is correctly positioned.

04



Test Product

Turn on the water supply and allow the shower to run.

FINAL CHECK · TURN ON & TEST

Before completing the installation, confirm: All connections are secure. Shower arm and rain shower head are correctly positioned. No leaks are present.

Care & Maintenance

MILD SOAP & WARM WATER

Clean with mild soap and warm water.

SOFT CLOTH ONLY

Use soft cloth only.

NO CITRUS, BLEACH OR ABRASIVE CLEANERS

These can damage the surface and affect longevity

Compliance

WATERMARK CERTIFIED

AS/NZS 3718

WELS APPROVED

3 STAR · 8 L/MIN

NCC LEAD-FREE

LESS THAN 0.25%

INSTALLATION STANDARD

AS/NZS 3500.1 & 3500.4