
rainco

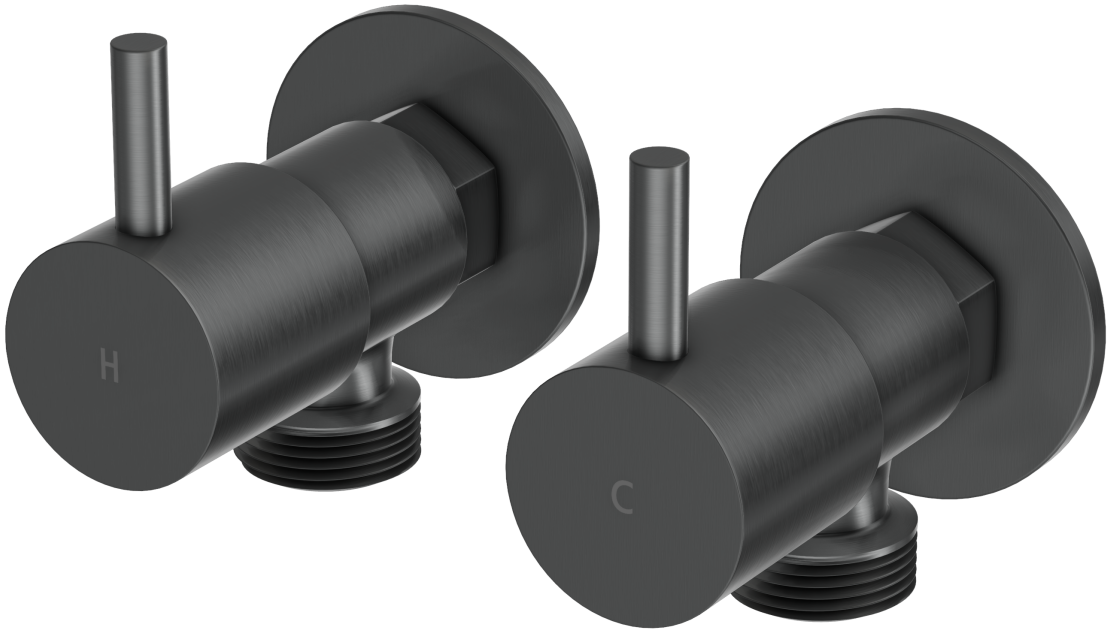

ESSENTIAL FUNCTION, ELEVATED DESIGN

WASHING MACHINE TAPS

AT A GLANCE

BEST FOR

These taps ensure smooth operation and reliable performance for both laundries and utility spaces

FEEL


Effortless water control

INSTALLATION

Wall-mounted, plumber required

rainco

Front View · Side View

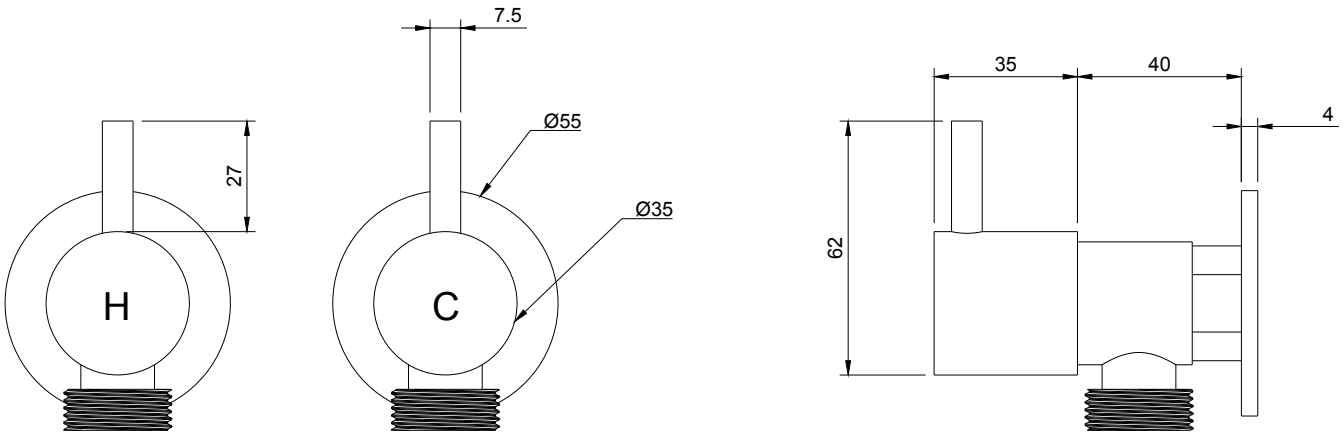

Specifications

MATERIAL

Solid **DZR** Lead-free Brass

CARTRIDGE

Citec ceramic Cartridge

PRESSURE RANGE

50–800 kPa

CONNECTIONS

Standard **G1/2”**

MOUNTING


Wall-mounted

DIMENSIONS

Wall projection **79 mm** · Cover rings’ diameter **Ø55 mm** · Water Control handle diameter **Ø35 mm**

rainco

Exploded View

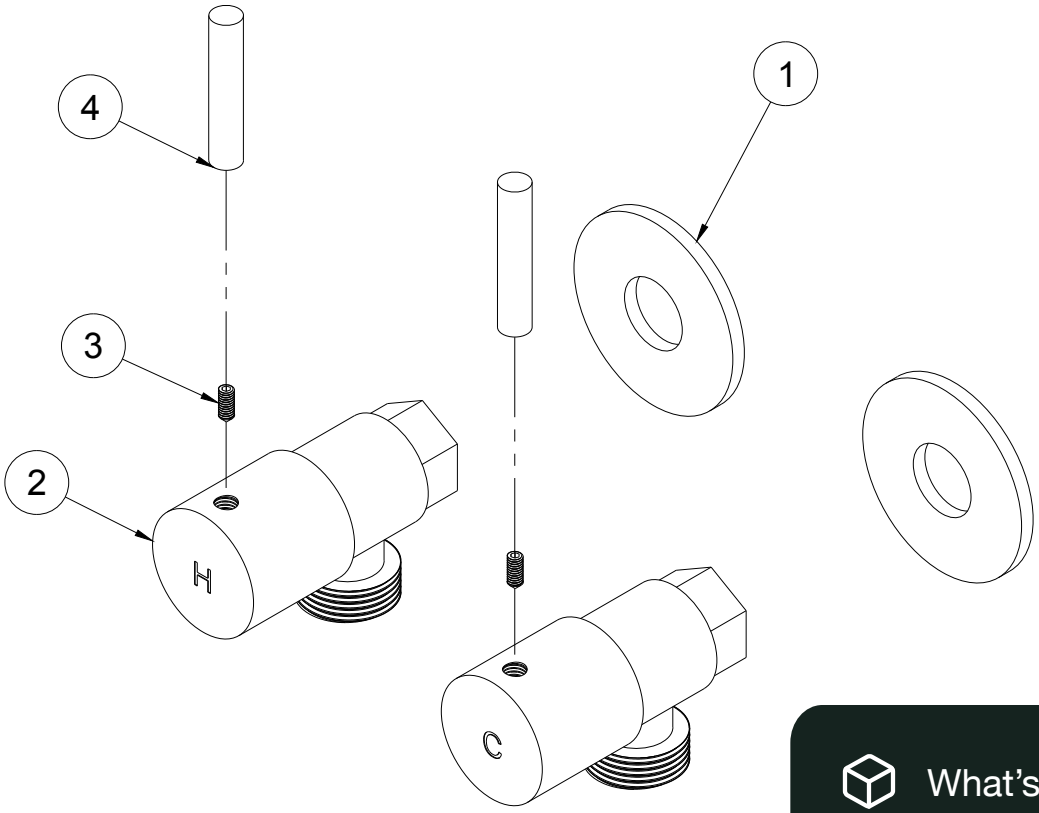

What's in the box

INCLUDED

1x	Hot Tap
1x	Cold Tap
2x	Rings
1x	Spare Grub Screw
1x	Mini Hex Wrench

EXPLODED VIEW

1. Cover Rings
2. Warer Control Handles
3. Grub Screw
4. Pin Lever

Finish Options


Antique Brass	**Brushed Nickel**	**Brushed Brass**	**Brushed Copper**	**Gun Metal**
AEA	AEA	PVD	PVD	PVD

rainco

Installation Guide

PLUMBER REQUIRED AS/NZS 3500


01

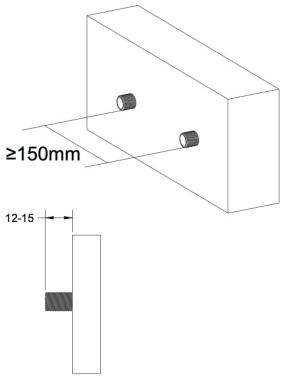

Install Cover Ring

Place the cover ring over the water outlet.


02

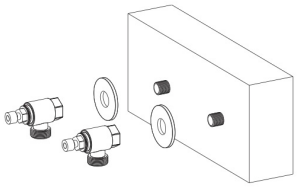

Attach Tap Handles

Screw the tap handles onto the water outlet nozzles.


03

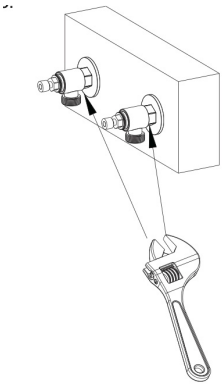

Tighten Handles

Tighten the handles securely.

04

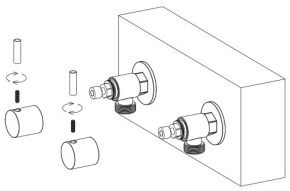

Connect Washing Machine Hose

Connect the washing machine hose to the taps and tighten securely.

INSTALLATION GUIDE

Ensure all components are ready before starting installation.

Care & Maintenance

MILD SOAP & WARM WATER

Clean with mild soap and warm water.

SOFT CLOTH ONLY

Use soft cloth only.

NO CITRUS, BLEACH OR ABRASIVE CLEANERS

These can damage the surface and affect longevity

Compliance

WATERMARK CERTIFIED

AS/NZS 3718

NCC LEAD-FREE

LESS THAN 0.25%

INSTALLATION STANDARD

AS/NZS 3500.1 & 3500.4