rainco



REFINED FUNCTION, ENDURING BEAUTY


HAVEN BATH FILLER WITH MIXER

AT A GLANCE

BEST FOR	HEIGHT	FEEL	INSTALLATION
Enhancing your bath experience	Stands tall with its curved spout and integrated mixer	Effortless control and handling	Floor-mounted, plumber required

rainco

Back View · Side View

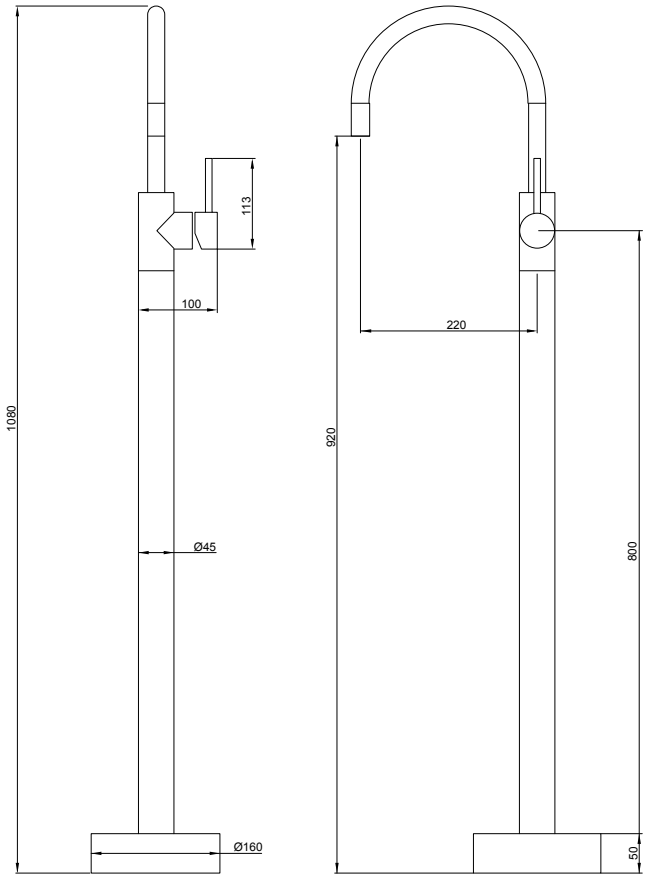

Specifications

MATERIAL

Lead-free Solid Brass

PRESSURE RANGE

50–800 kPa

CONNECTIONS

Standard **G1/2”**

MOUNTING

Floor-mounted

DIMENSIONS

Overall Height **1080 mm**
Body diameter **Ø45 mm**
Base Plate Diameter **Ø160 mm**
Mixer height **113 mm**

What’s in the box

INCLUDED

1x	Bath Rail
1x	Filler with Mixer
1x	Floor Plate
1x	Mixer Body
1x	Fixing Bracket
2x	Flexi Hose
4x	Fixing Screws
1x	Aerator Remover Tool
1x	Mini Hex Wrench

Finish Options


Antique Brass	**Brushed Nickel**	**Brushed Brass**	**Brushed Copper**	**Gun Metal**
AEA	AEA	PVD	PVD	PVD

rainco

Installation Guide

PLUMBER REQUIRED AS/NZS 3500


01



Assemble the Tap Body

Position the main tap body and mark the mounting holes. Ensure the tap is positioned correctly before drilling.


02

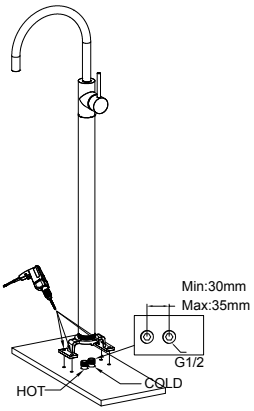

Prepare the Water Connections

Unscrew the tap body and connect the hot (red) and cold (blue) flexible hoses to the main body. Ensure the connections are secure.


03

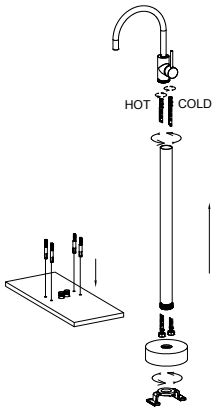

Install the Tap Body

Reassemble the tap and place it into the mounting holes. Connect the hot and cold hoses to their corresponding water supplies. Check all connections for leaks.

04

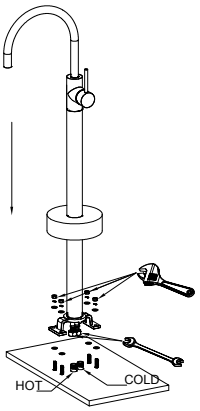

Secure the Tap

Fit the mounting plate and washers underneath the benchtop. Tighten the fixing nuts and screws to secure the tap firmly in place. Connect the hand shower to the main tap body and check that everything is secure.

IMPORTANT

Turn on the water supply and test the product for leaks before completing any tiling or finishing work. Rainco will not be responsible for costs associated with removing the product if a fault is found after installation.

Care & Maintenance

MILD SOAP & WARM WATER

Clean with mild soap and warm water.

SOFT CLOTH ONLY

Use soft cloth only.

NO CITRUS, BLEACH OR ABRASIVE CLEANERS

These can damage the surface and affect longevity

Compliance

WATERMARK CERTIFIED

AS/NZS 3718

NCC LEAD-FREE

LESS THAN 0.25%

INSTALLATION STANDARD

AS/NZS 3500.1 & 3500.4