



REFINED FUNCTION, ENDURING BEAUTY

SERENO BATH FILLER WITH HAND SHOWER

AT A GLANCE



BEST FOR

Enhancing your
bath experience



HEIGHT

Stands tall, accompanied
by a hand shower wand
that offers targeted
functionality





FEEL

Effortless control and
handling



INSTALLATION

Floor-mounted,
plumber required

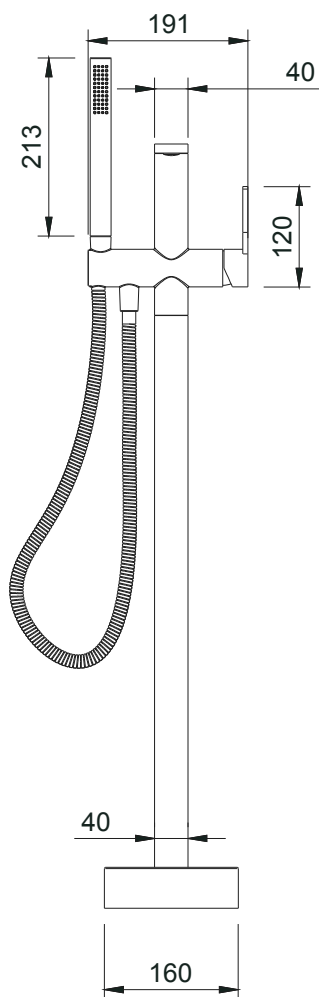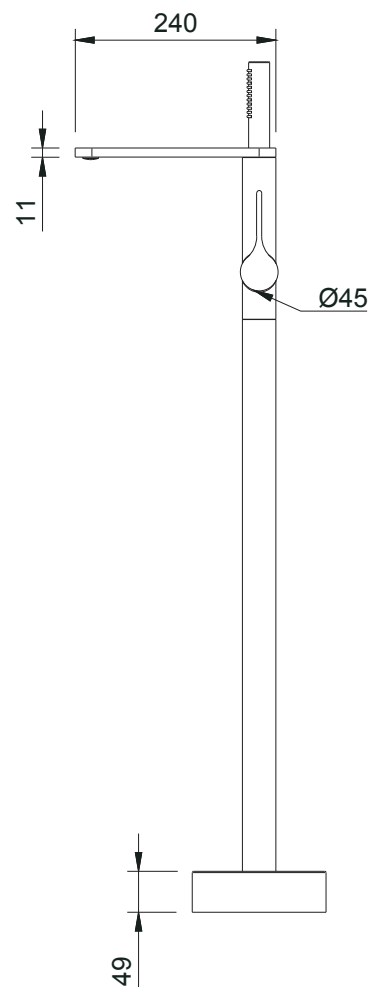

Specifications



MATERIAL

Premium **SS304** stainless steel



CARTRIDGE

Citec ceramic · **Ø35 mm**



FLOW RATE

No flow restriction



PRESSURE RANGE

50–800 kPa



TEMPERATURE

4–80 °C



CONNECTIONS

Standard **G1/2"**




MOUNTING

Floor-mounted



DIMENSIONS

Height **880 mm** · spout **24 mm** · base **150 mm**
· hand **213 mm**

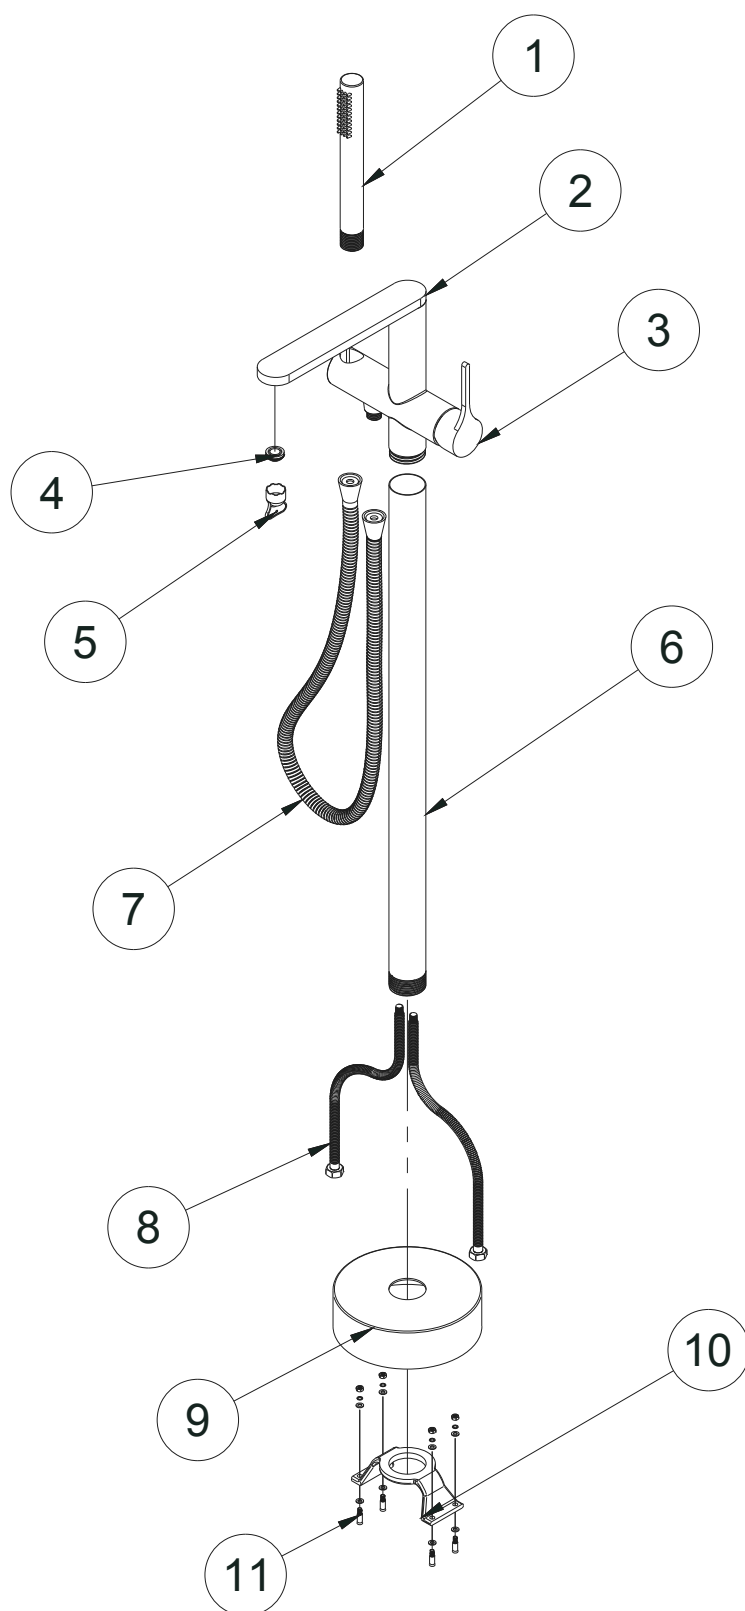

What's in the box

INCLUDED

1x	Bath Filler Stand Pipe
1x	Hand Shower Wand
1x	150cm Hand Shower Hose
1x	Base Cover Plate
1x	Mixer Body
1x	Fixing Bracket
4x	Fixing Screws
1x	Aerator Remover Tool
1x	Spare Grub Screw

EXPLODED VIEW

- (1) Hand Shower Wand
- (2) Bath Spout
- (3) Temperature Control Handle
- (4) Aerator
- (5) Aerator Remover Tool
- (6) Bath Filler Standpipe
- (7) Hand Shower Flexible Hose
- (8) Flexir Hose
- (9) Base Cover Plate
- (10) Fixing Bracket
- (11) Mounting Screws

Finish Options



Antique Brass
AEA



Brushed Nickel
AEA



Brushed Brass
PVD



Brushed Copper
PVD




Gun Metal
PVD

Installation Guide

PLUMBER REQUIRED AS/NZS 3500


01



Position Mixer Body

Place the mixer body in position and mark the required cut-out area.


02

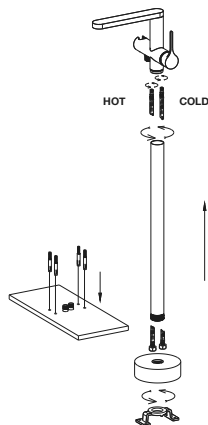

Connect Hoses

Remove the body and connect the hot (red) and cold (blue) hoses to the correct inlets.


03

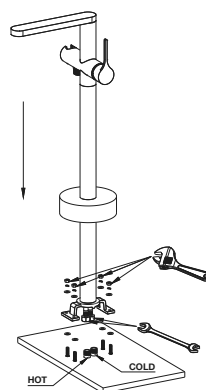

Reinstall / Connect Water

Reinstall the mixer body and connect the hoses to the water supply. Turn on the water and check for leaks. Tighten if needed.

04

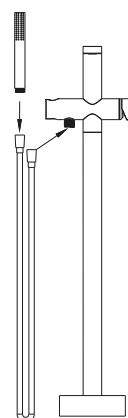

Attach Hand Shower

Connect the hand shower to the mixer body.



FINAL CHECK · TURN ON & TEST

Turn on the mixer and check that everything is working properly with no leaks.

Care & Maintenance



MILD SOAP & WARM WATER

Clean gently to keep the surface bright.



SOFT CLOTH ONLY

Never use scourers or rough pads.



NO CITRUS, BLEACH OR ABRASIVES

These can damage the surface and affect longevity.

Compliance



WATERMARK CERTIFIED

AS/NZS 3718



WELS APPROVED

3 STAR · 8 L/MIN



NCC LEAD-FREE

LESS THAN 0.25%



INSTALLATION STANDARD

AS/NZS 3500.1 & 3500.4